
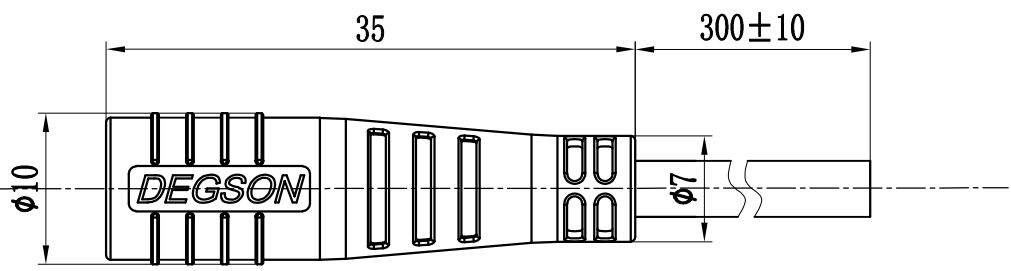


未注公差/General tolerances(mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

未标尺寸请参考3D文件




型号说明

SM-EBS-0006-F-L300-00A(H)


插座
包塑式
系列名称
母端
通用型环保产品
线长300mm

孔位标记示意

孔位	导线颜色
1	黑色
2	棕色
3	红色
4	橙色
5	蓝色
6	绿色

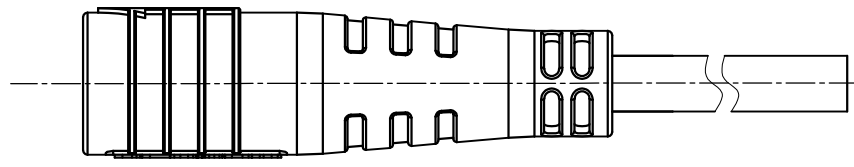

产品插针数量
功率针0pin,
PE针0pin,
信号针6pin

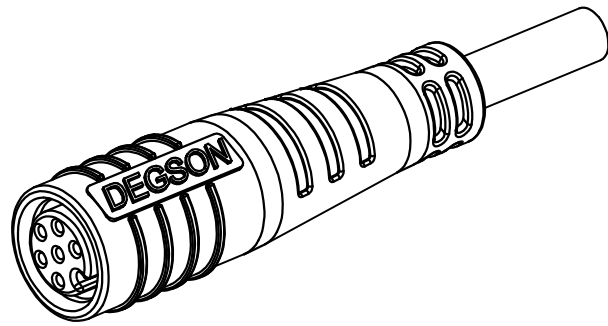

额定电压/电流/Rated Voltage/Current	48V/2A
绝缘电阻/Insulation resistance	≥30MΩ
插拔次数/Mechanical working life(mating cycles)	100
耐电压/Withstanding voltage	300V AC
使用温度范围/Operating temperature(°C)	-25~+85
防水等级/Levels of protection	IP66 (mated)
接线方式/Terminal	Soldering
导线外径范围/Wire range(mm)	3.7

MATERIAL: /	SURFACE: /		
MAT NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD:	NAME: SM-EBS-0006-F-L300-00A(H)		
CHKD:	DRAWING NO.:		
DRFT: ZhuCG 2021.8.20	SCALE: 2:1		REV TO
REV	ECN	DESCRIPTION	DRFT DATE
①			20XX.XX.XX
SIZE: A4	TYPE: CUSTOMER DRAWING	SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
①				20XX.XX.XX

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经本厂书面许可，否则禁止复制、复制或传播本文件内容。 未经授权，不得复制或传播本文件内容。 侵权者将承担法律责任。 侵权者将承担法律责任。