
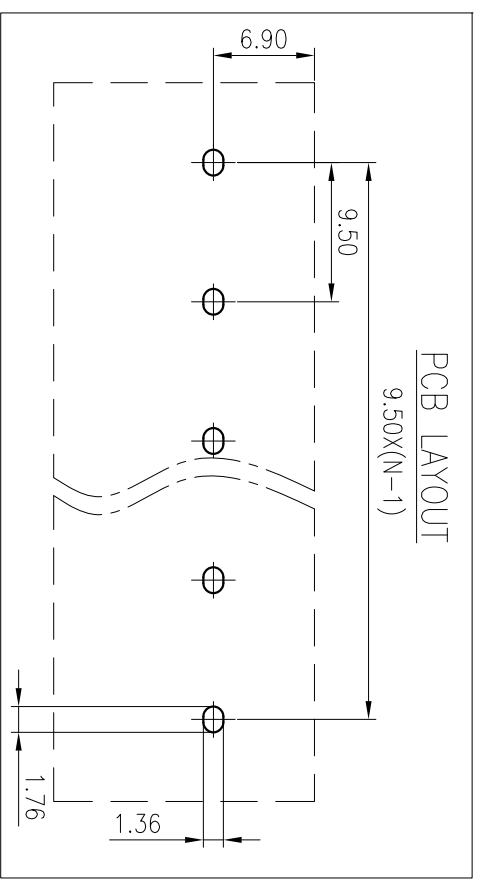


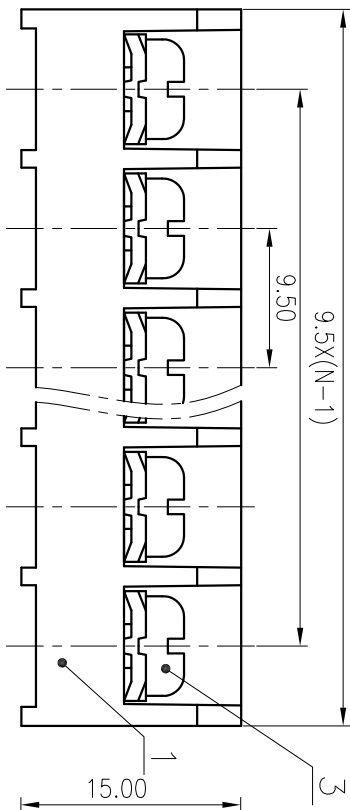

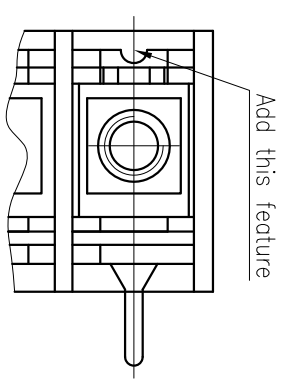


公差 (General tolerances)(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.43	±0.51	±0.60	±0.70	±0.83	±1.05	±1.15	±1.60	±2.20	±2.50	±Z
																0.1/10

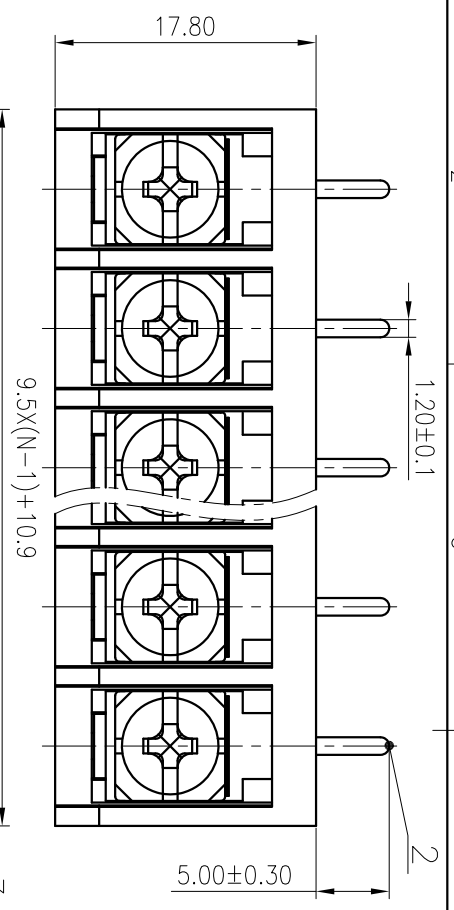

3	Screw	Steel	M4/Ni Plated
2	Pin Header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/201 150/201 300/10			
IEC 标准/IEC Standard: 过压类别/Overvoltage Category/污秽等级/ Pollution Degree III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) 600/32 600/32 1000/32			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) 6 6 6			
螺旋扭矩/Torque Tightening(N.m/Lb.in) M4, 1.2/10.53			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG) 0.5~4/22~12			
间距/Pitch(mm)/线数范围/Poles 9.5/N=02~28P			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: XieXD 2020.05.28

DRAWING NO.: DG46R-C01

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波高松电子有限公司

DRAWING NO.: DG46R-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1