
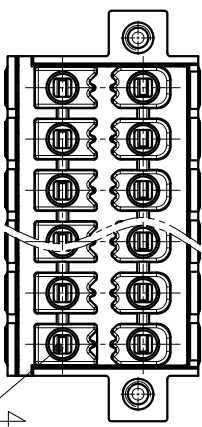
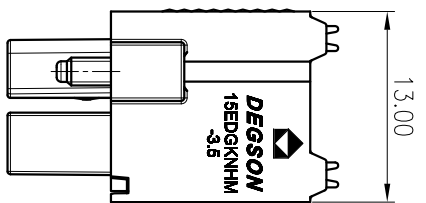
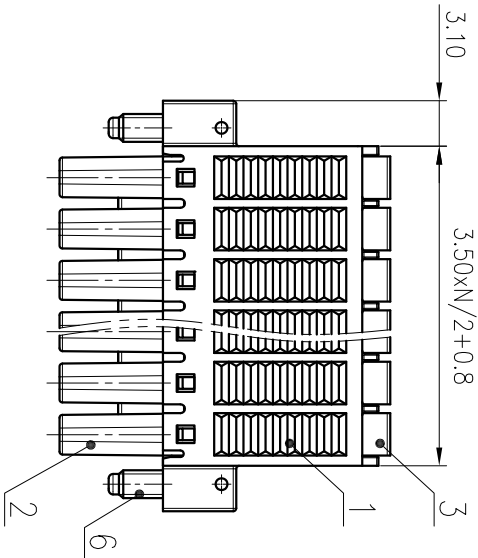
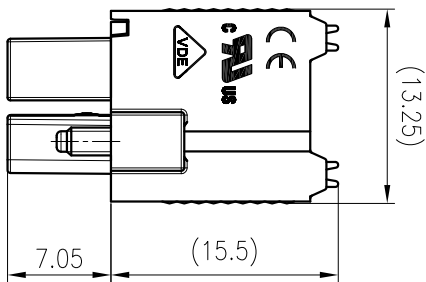


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>18	>50
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
±2	±2	±2	±2

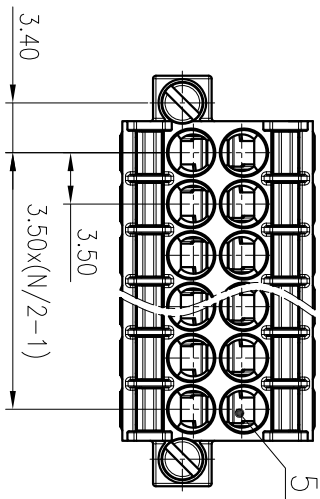

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	M2/Zn Plated
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	50/8	/
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	200/9.5	250/9.5	320/9.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26~16/0.2~1.5		
间距/Pitch(mm)/线数范围/Poles	3.50/N=04~48P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: SURFACE: Yes

NINGBO DEGSON ELECTRICAL CO., LTD

15EDGKNHM-3.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGKNHM-3.5-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE