
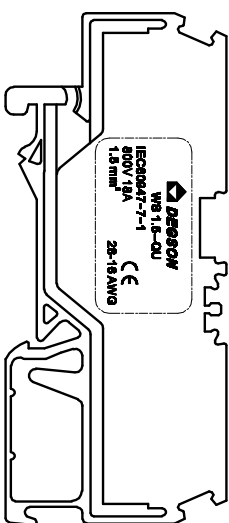

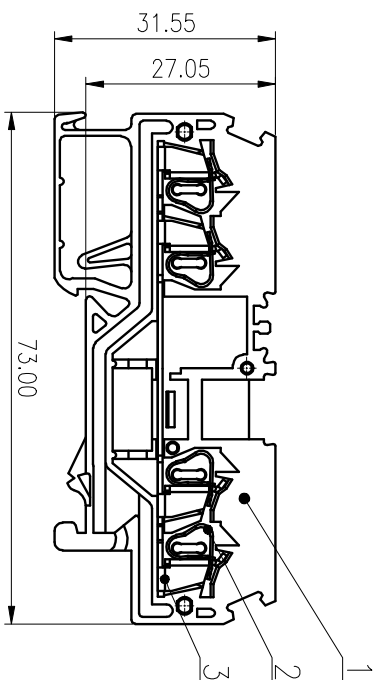


精度等级/General Tolerances(mm)												0.1/1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	±Z	
~	~	~	~	~	~	~	~	~	~	~	~	~		
3	6	10	18	30	50	80	120	180	280	315	400	500	±Z	
±0.12		±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

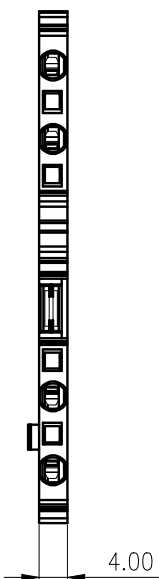

3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	600/10	/	/
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category /污染等级 /Pollution Degree	III /3	/	/
额定电压/电涌 /Rated Voltage(V)/Current(A)	800/18	/	/
额定脉冲电压 (KV) /Rate Impulse Voltage(KV)	8.0		
线径范围 (硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG)	0.2~1.5/28~16		
间距 /Pitch(mm)	4.0		
剥线长度 /Stripping length(mm)	12~13		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:			
PANTONE / RAL	/		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.05.30
 CHKD: Mao J 2020.05.30

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
WS1.5-QU-01P-1Y-00A(H)

DRAWING NO.: WS1.5-QU-C01
 DFT: ZhengQG 2020.05.16
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 REV T1
 SHEET 1/1

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				
4				

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				
4				

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				
4				

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				
4				