


Pitch range in mm		Nominal dimension range	
mm	In mm	mm	In mm
Over 6	Over 10	Over 30	Over 60
TO 6	TO 10	TO 30	TO 60
Over 10	Over 24	Over 60	Over 100
TO 10	TO 24	TO 60	TO 100
Over 15	Over 30	Over 100	Over 150
TO 15	TO 30	TO 100	TO 150
±2°		±2°	

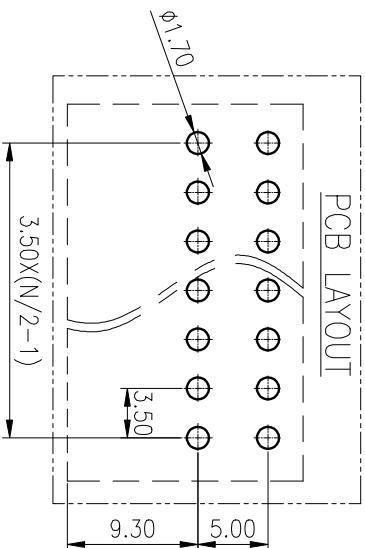

REV	ECN	DESCRIPTION	DRAFT	DATE

3	Pin 1	Copper	Sn Plated
2	Pin 1	Copper	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/10	/	/
IEC 标准 / IEC Standard:	/	/	/
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/3
额定电压/电涌 / Rated Voltage(V)/Current(A)	/	/	250/10
额定脉冲电压 (KV) / Rate Impulse Voltage (KV)	/	/	2.5
间距 / Pitch (mm) / 线数 / Poles	3.50	N=04~48P	
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 标准 / Conform to RoHS	Yes		

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	Valid		
APPD:			
CHKD:			
DRAFT:	Zhuwm 2008.11.26		

NAME:	8EDGRH-3.5-XXP-11-01A(H)
DRAWING NO.:	8EDGRH-3.5-E02
TYPE:	CUSTOMER DRAWING

NINGBO DEGSON ELECTRICAL CO., LTD	宁波高松电子有限公司
SCALE: 2:1	SHEET 1/1