



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless written authorization is granted. DEGSON will be liable for compensation. All rights reserved for patent, utility, model or design registrations. 非经书面授权, 严禁禁止转让、复制、利用、交加本文件的内容, 一经发现将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。



未注公差/General tolerances(mm)												D 0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315		>400	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

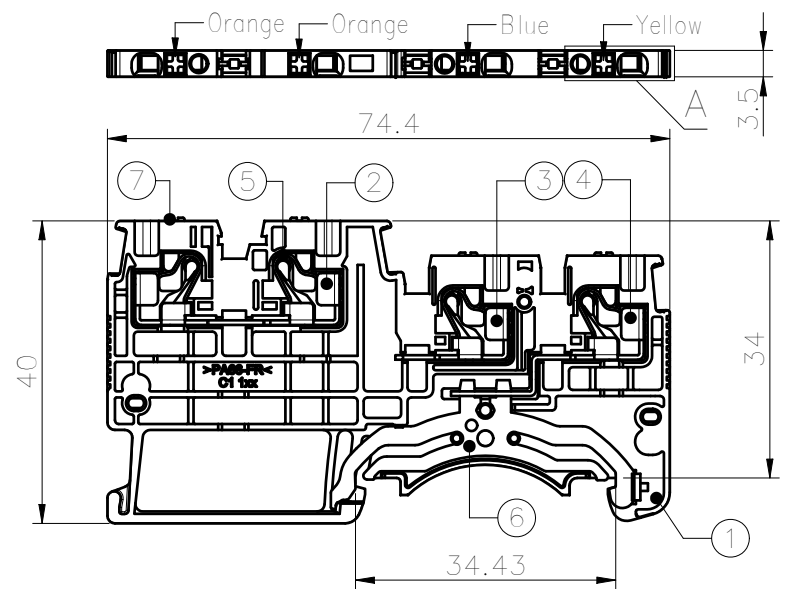

A
2:1



this surface is green

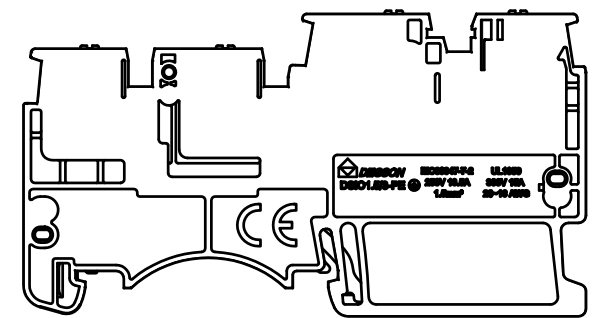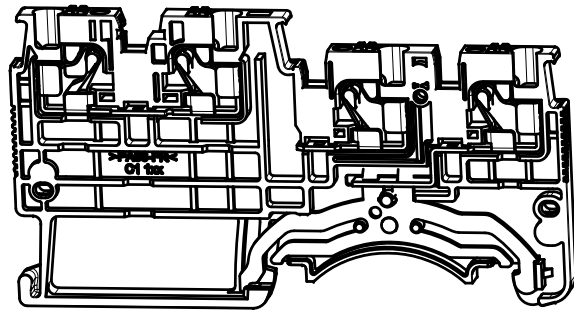

ITEM	NAME OF PART	MATERIAL	NOTES
7	Button	PA66+GF%	UL94V-0
6	Grounding	Copper alloy	Sn Plated
5	Spring	Stainless steel	/
4	Current_carrier3	Copper	Sn Plated
3	Current_carrier2	Copper	Sn Plated
2	Current_carrier1	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300V/15	150/15	300/10
IEC 标准/IEC Standard:			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	250/13.5	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	26-16.14SOL / 0.14-1.5 conductor cross Section flexible, with ferrule With plastic sleeve max.0.5mm ² (stripping length : 8mm)		
间距/Pitch(mm)/线数范围/Poles	3.5/N=01P		
剥线长度/Stripping length(mm)	8~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

DEGSON

APPD: Li GL 2022.06.08
 CHKD: Ma EK 2022.06.08
 DRFT: Huo SR 2022.06.08

MATERIAL: /	SURFACE: /	
MAT NO./REV: /	MAT STATUS: /	
NAME DSI01.5/3-PE-01P-1Y-00A(H)		
DRAWING NO. /	TYPE CUSTOMER DRAWING	DRAWING STATUS /
SCALE 2:1	SHEET 1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
00	/	/	Huo SR	2022.06.08