
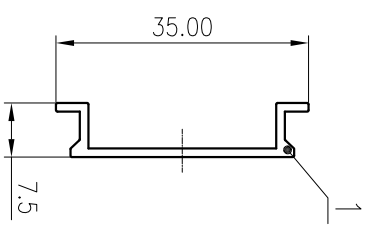


| 公差/General Tolerances(mm) |     | 0.1/1.0 |
|---------------------------|-----|---------|
| 0                         | >3  | ~       |
| 3                         | 6   | ~       |
| 6                         | 10  | ~       |
| 10                        | 18  | ~       |
| 18                        | 30  | ~       |
| 30                        | 50  | ~       |
| 50                        | 80  | ~       |
| 80                        | 120 | ~       |
| 120                       | 180 | ~       |
| 180                       | 250 | ~       |
| 250                       | 315 | ~       |
| 315                       | 400 | ~       |
| 400                       | 500 | ~       |
| 500                       | ~   | >500    |
| >500                      | ~   | ~       |
| ~                         | ~   | ±2°     |

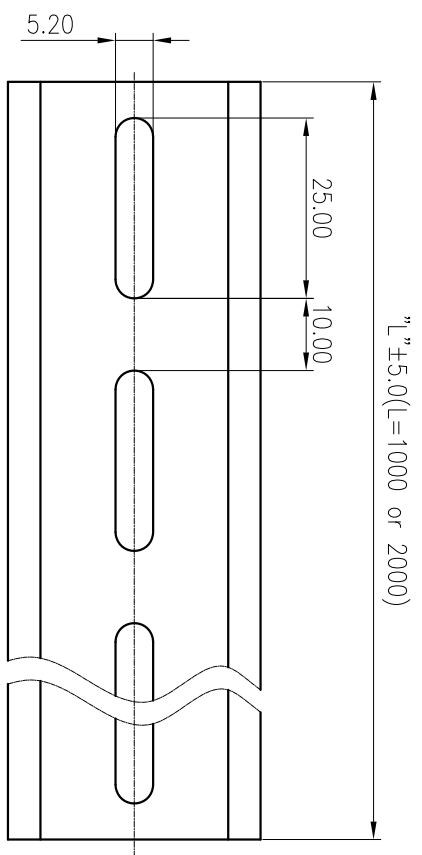

| ITEM | NAME OF PART            | MATERIAL  | NOTES |
|------|-------------------------|-----------|-------|
| 1    | NS35/7.5-AL-X000-00A(H) | Aluminium | X=1,2 |

使用温度范围/Operating temperature(°C) -40~+105  
符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /  
STATUS: /  
NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

APPD: LI GL 2020.06.10  
CHKD: Mao J 2020.06.10  
DRAFT: Feng X 2020.06.10  
DRAWING NO.: NS35/7.5-AL-C01  
TYPE: CUSTOMER DRAWING

| REV | ECN | DESCRIPTION | DRAFT | DATE | SIZE: A4 | SCALE: 1:1 | REV | T0 |
|-----|-----|-------------|-------|------|----------|------------|-----|----|
| 1   |     |             |       |      |          |            |     |    |