
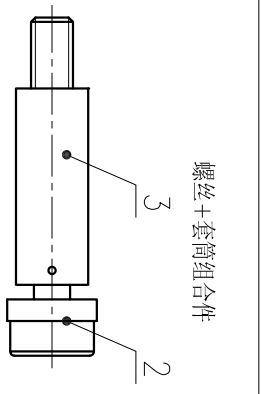
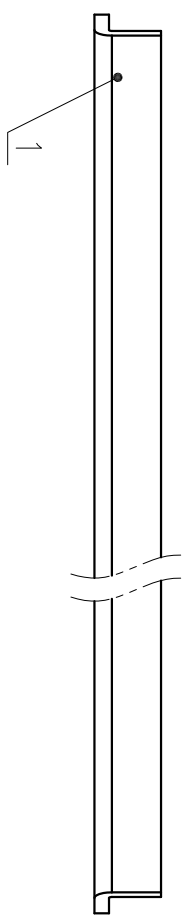



公差/General Tolerances(mm)		D	
0	>3	>30	0.1/10
~	~	~	~
3	6	~	~
6	10	~	~
10	18	~	~
18	30	~	~
30	50	~	~
50	80	~	~
80	120	~	~
120	180	~	~
180	250	~	~
250	315	~	~
315	400	~	~
400	500	~	~
500	>500	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.09	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50

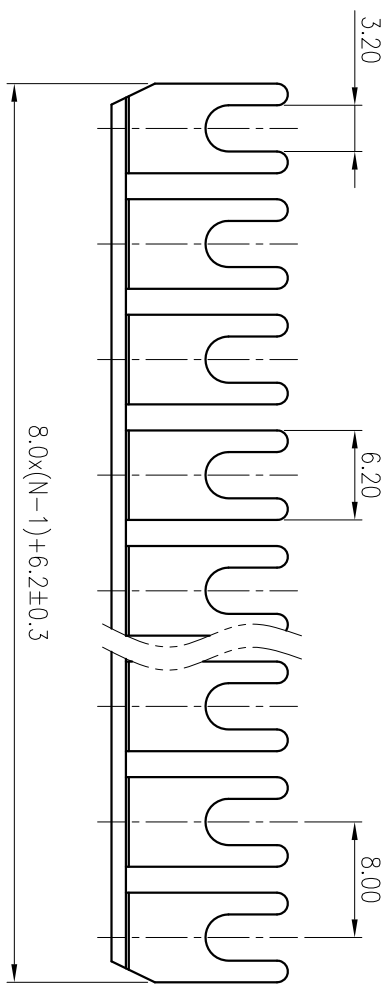

螺丝+套筒组合件

ITEM	NAME OF PART	MATERIAL	NOTES
3	Pillar	Copper Alloy	M3/Sn Plated
2	Screw	Copper Alloy	M3/Sn Plated
1	Bridgeware	Copper	Sn Plated

螺丝扭矩/Torque Tightening(N·m/Lb·in) M3: 0.5/4.47
 间距/Pitch(mm)/线数范围/Poles 8.0/N=02~10P
 使用温度范围/Operating Temperature(°C) -40~+105
 符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: SURFACE: Yes

MAT NO.:	/	NAME:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DRAWING NO.:	FBR16-RTK/S-C01	REV
APPD:	LI GL 2020.06.06	DRAWING NO.:	FBR16-RTK/S-C01	REV
CHKD:	Mao J 2020.06.06	TYPE:	CUSTOMER DRAWING	TO
DFT:	Feng X 2020.05.22	SCALE:	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE	SCALE	SHEET
					A4	2:1	1/1