



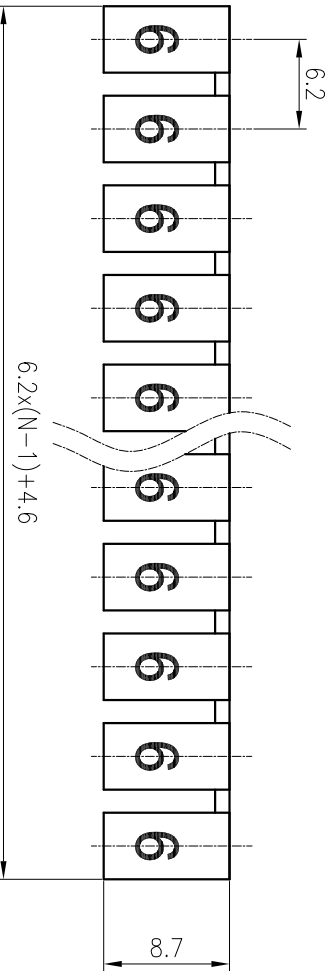


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
材料公差/General tolerances(mm)													
±0.12 ±0.18 ±0.22 ±0.28 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													

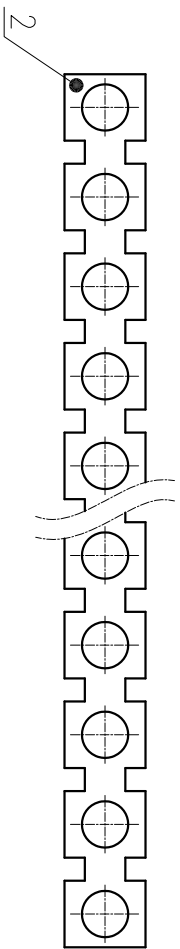

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
	螺丝扭矩/Torque	Tightening(N·m/Lb.in)	M3.0.5/4.43
	间距/Pitch (mm)	螺距范围/Poles	6.2/N=02~10P
	使用温度范围/Operating temperature(°C)		-40~+105
载流体与螺丝分开包装于同一封盒中/Current carrier and Screws should be packed individually,which must be put in the same box			
符合RoHS环保要求/Conform to RoHS			
Yes			

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.06.04

CHKD: Mao J 2020.06.04

DRAFT: Chen K 2020.06.04

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

FBIXX-6

DRAWING NO.: FBIXX-6-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE



SIZE: A4

(mm)

REV T1