


Pitch Range	In		Nominal Dimension		Range		Tolerance
	Over	Under	Over	Under	Over	Under	
6	Over 10	Under 6	Over 30	Under 10	Over 100	Under 30	0.1/10
TO	TO 10	TO 6	TO 30	TO 10	TO 100	TO 30	≤
6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	±2°
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover 1	PA66	UL94V-0
2	Side Housing 1	PA66	UL94V-0
3	Middle Housing 1	PA66	UL94V-0
4	Middle Housing 2	PA66	UL94V-0
5	Cover 2	PA66	UL94V-0
6	Spring	Stainless Steel	
7	Clamp	Copper alloy	Sn Plated

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300	151	150/151
IEC 标准/IEC Standard:	300/710/300/710		
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
绝缘/Insulation Degree	320/20		
额定电压/电涌/Rated Voltage(V)/Current(A)	4		
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	0.2~2.5/22~14		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	5.08/N=02~24P		
间距/Pitch(mm)/线径范围/Poles	9~10		
剥线长度/Stripping Length(mm)	-40~+105		
使用温度范围/Operating Temperature(°C)	Yes		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE 428C		

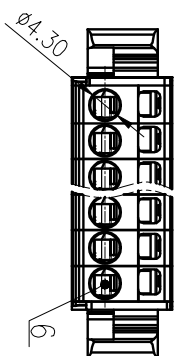

MATERIAL: / SURFACE: / PANTONE: 428C

MAT NO.: / STATUS: / APPD: / CHKD: / DRAFT: XieZhp 2020.06.17

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
8EDGKGB-5.08-XXP-11-1001A(H)

DRAWING NO.: 8EDGKGB-5.08-1000-C02 TYPE: CUSTOMER DRAWING SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE