





Pitch Range		In mm						Nominal Dimension		Range		In mm	
Over	6	Over	10	Over	30	Over	60	Over	100	Over	150	0.1/1.0	
TO	10	TO	24	TO	60	TO	100	TO	150	TO	150	±2°	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°					

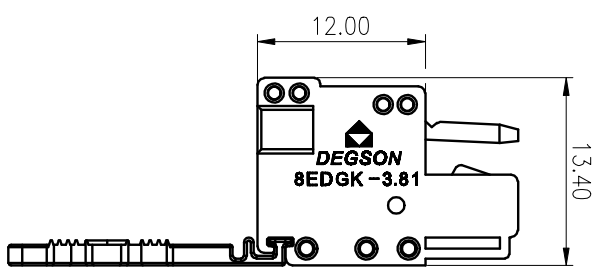

Special tolerance table

Size	Rangr	Tolerance
A, B	12 ≤ N ≤ 24	+1.2/-0

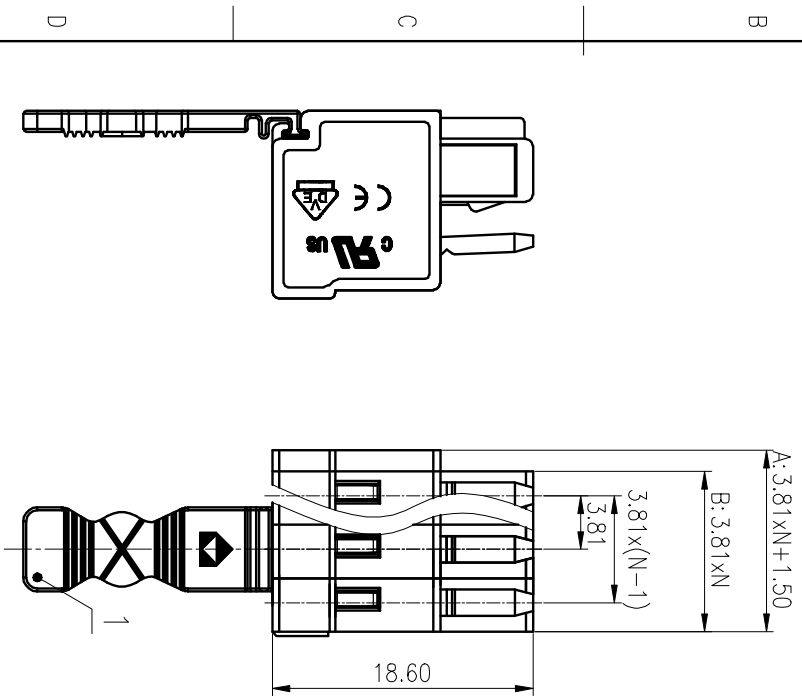

ITEM	NAME OF PART	MATERIAL	NOTES
2	Semi-manufactures		
1	Housing	PAG6	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category/ 污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌 /Rated Voltage(V)/Current(A)	130/10	/	/
额定脉冲电压(kV) /Rate Impulse Voltage(kV)	2.5	/	/
线芯范围 (硬线和软线) /Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5/28~14		
剥线长度/Stripping length(mm)	3.81/N=02~24P		
使用温度范围 /Operating temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:	PANTONE 7534U		

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: MJN 2017.03.01

DRAWING NO.: 8EDGKE-3.81-C02

TYPE: CUSTOMER DRAWING

SCALE: 2:1

REV T0

SHEET 1/2

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

8EDGKE-3.81-XXP-11-01A(H)

REV EGN DESCRIPTION DRAFT DATE

A B C D

1 2 3 4 5 6