
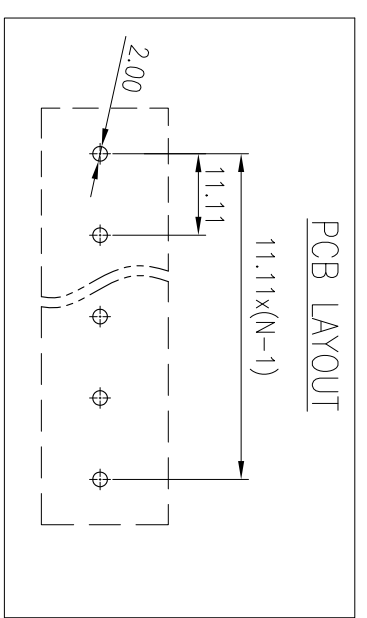
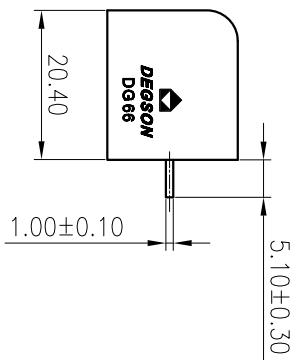
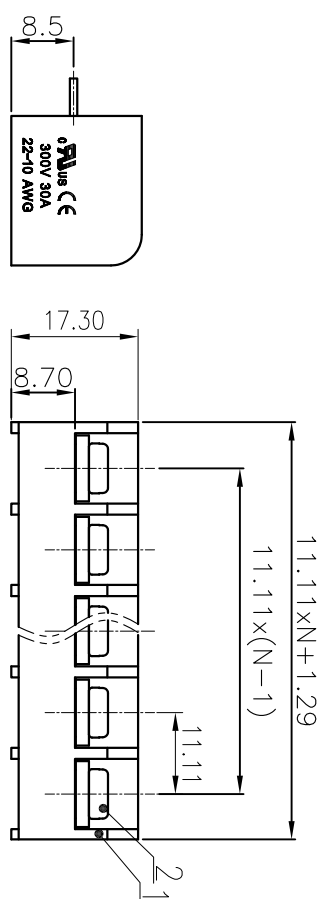


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>18
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±4.00	±500
±2.50	±2.50	±400	±500
±2.50	±2.50	±400	±500
±2.50	±2.50	±400	±500
±2.50	±2.50	±400	±500

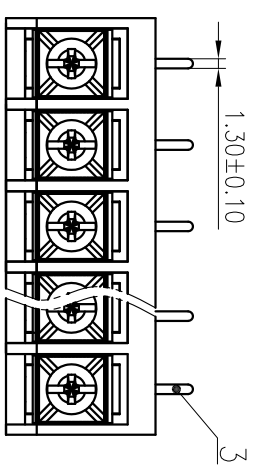

3	Pin header	Copper alloy	M4/Sn Plated
2	Screw	Steel	M4/NI Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:			
额定电压/Rated Voltage(V)	300/301	300/301	300/10
额定电流/Rated Current(A)	3	2	1
过压类别/Overvoltage Category/污染等级			
级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	600/41	600/41	1000/41
额定脉冲电压/Rate Impulse Voltage(KV)	6	6	6
额定扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.20/10.62		
线径范围/硬线和软线/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	6.0/22~10		
间距/Pitch(mm)/线数范围/Poles	11.11/N=02~12P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: /  
 CHKD: /

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD  
 DRAWING NO.: DG66R-C01

DRAFT: CenMZ 2020.05.27  
 TYPE: CUSTOMER DRAWING  
 SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE