



(W/O COVER)

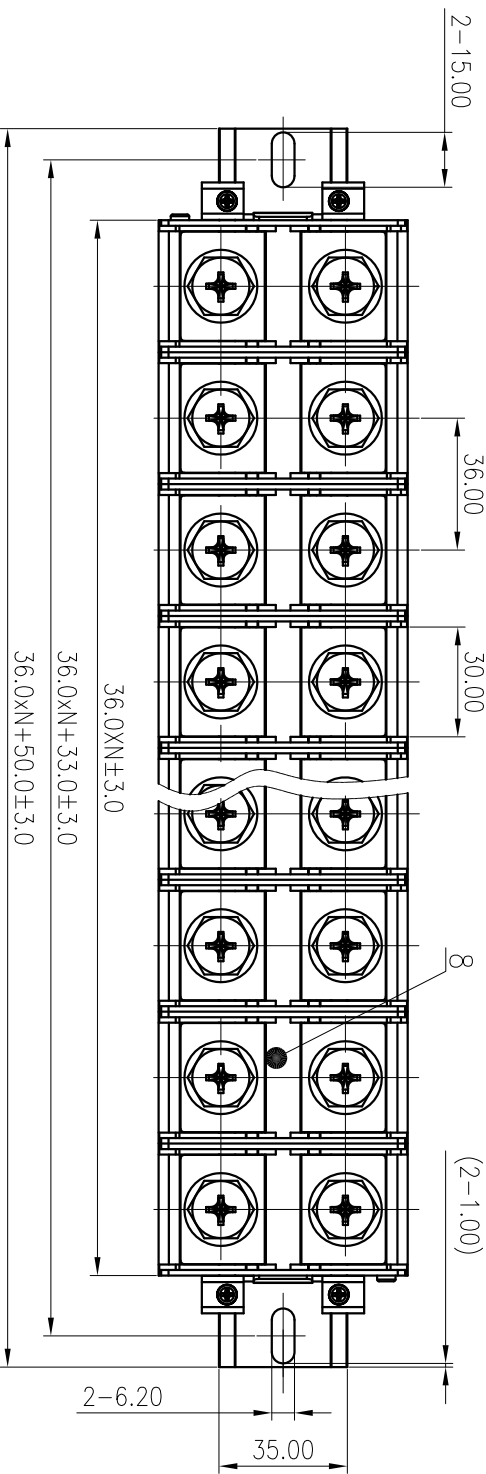

Pitch Range in mm		Nominal Dimension Range in mm						
Over	Over	Over	Over	Over	Over	Over	Over	0.1/1.0
6	10	10	30	60	100	150	150	
TO	TO	TO	TO	TO	TO	TO	TO	≤
6	10	24	30	60	100	150	150	
±0.15 ±0.20		±0.30 ±0.50		±0.70 ±1.00		±1.30 ±1.30		±2*

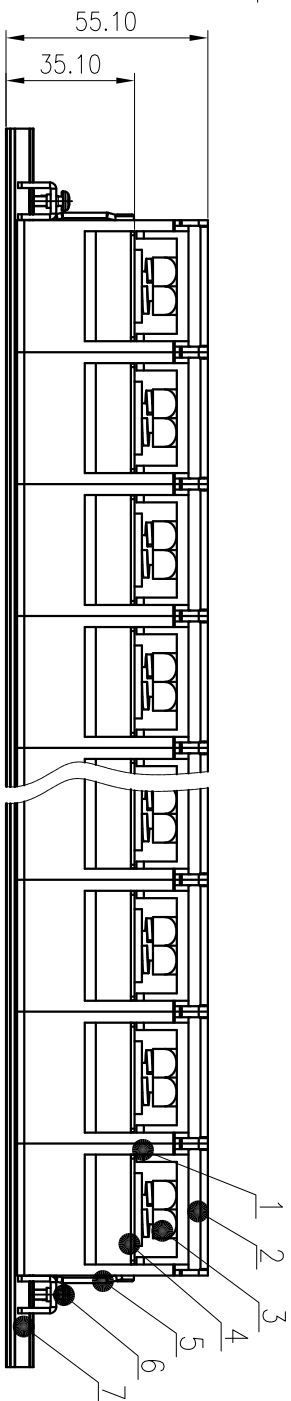

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing 1	PC	UL94V-0
2	Cover	PC	UL94V-2
3	Screw 1	Steel	M10/Zn Plated
4	Current carrier	Copper alloy	Ni plated
5	Fastener	SPCC	Zn plated
6	Screw 2	Steel	M3/Zn Plated
7	Rail	AL	
8	Tag	PVC	UL94V-0
9	Nut	Steel	Zn plated
10	Housing 2	PC	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/240	600/240	600/5
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3		
额定电压/电流/Rated Voltage(V)/Current(A)	1000/269/1000/269/1000/269		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M10, 4.0/35.44		
线径范围/Wire Range(Kcmil)	4~250 Kcmil		
间距/Pitch(mm)/线数范围/Poles	36.00/N=01~16P		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: Nick 2016.01.27

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DGR240-XXP-1Y-10A(H)

DRAWING NO.: DGR240-C02

TYPE: CUSTOMER DRAWING

SCALE: 1:2

REV	ECN	DESCRIPTION	DRAFT	DATE