


公差带/General tolerances(mm)		0.1/1.0
0	>3	~
3	>6	~
6	>10	~
10	>18	~
18	>30	~
30	>50	~
50	>80	~
80	>120	~
120	>180	~
180	>250	~
250	>315	~
315	>400	~
400	>500	~
500	>630	~
630	>800	~
800	>1000	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.80	±1.05
±1.15	±1.60	±2.20
±2.50	±2.50	±2.50
±Z	±Z	±Z

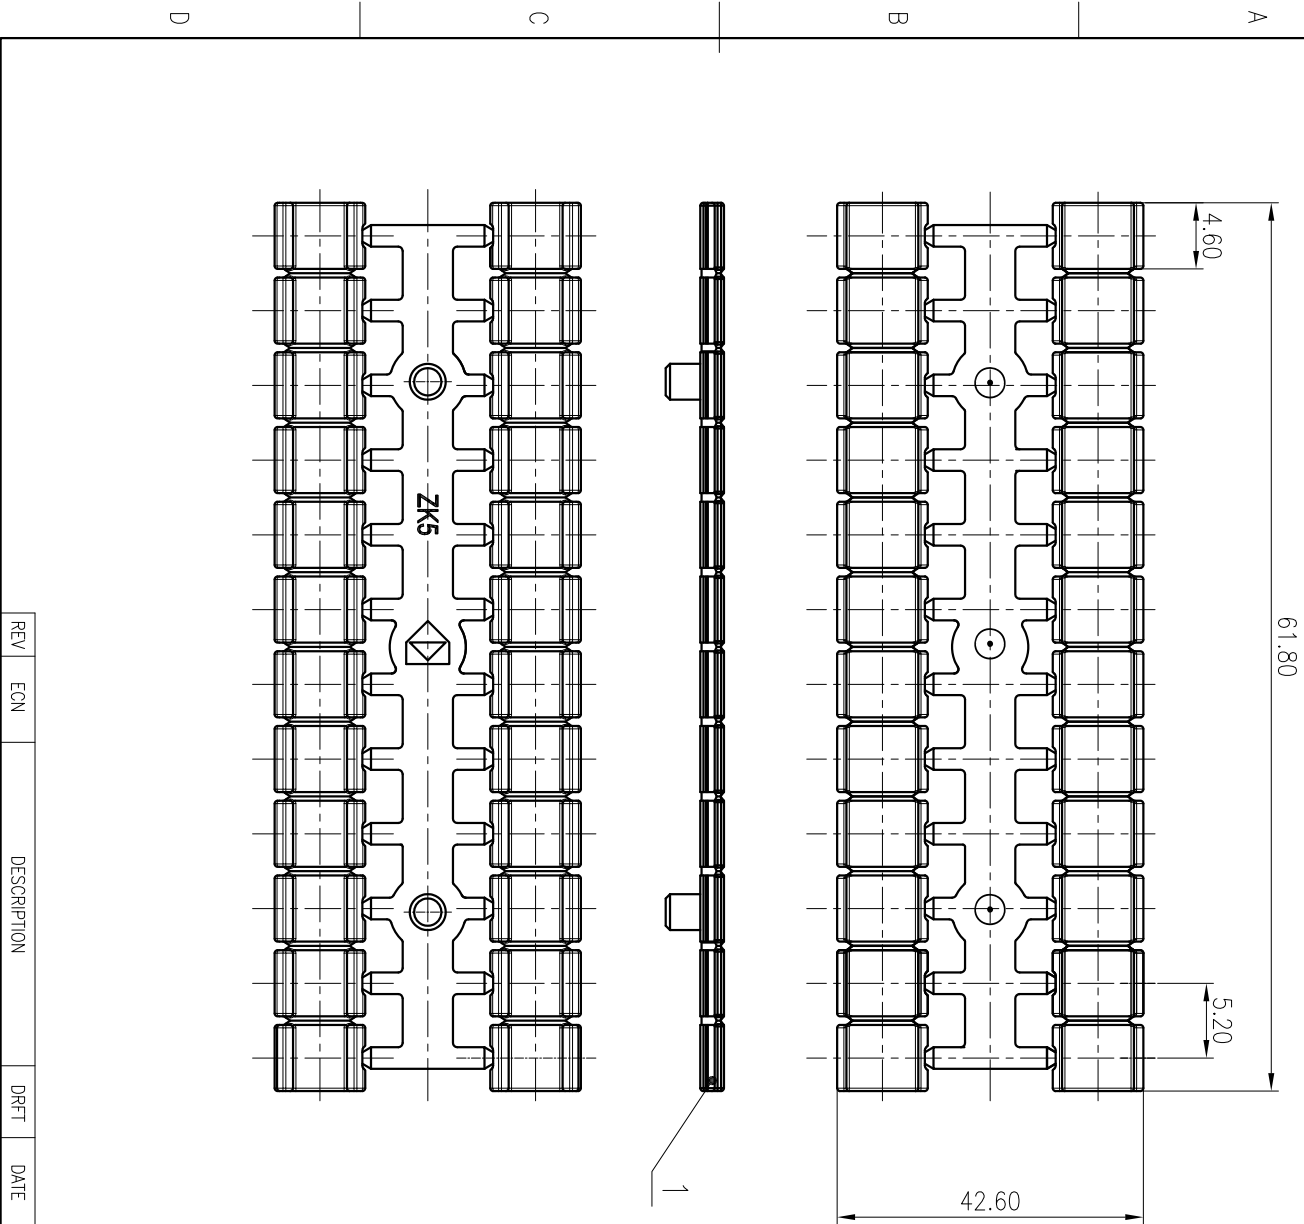

MATERIAL:			
MAT NO.:	/		
STATUS:	/		
APPD:	LI	GL	2020.06.06
CHKD:	MGO	J	2020.06.06
DRTT:	FENG	X	2020.05.30
NAME:	ZK5-24P-1Y-00A(H)		
DRAWING NO.:	ZK5-C01	SCALE:	2:1
TYPE:	CUSTOMER DRAWING		SHEET
REV:	TO-2	REV:	1/1
ITEM	1	NAME OF PART	Housing
MATERIAL	PC	UL94V-2	
间距/Pitch(mm)/线数范围/Poles	5.20/24P	NOTES	
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
SURFACE:			

**DEGSON**® 宁波高松电子有限公司  
 NINGBO DEGSON ELECTRICAL CO., LTD

APPD: LI GL 2020.06.06  
 CHKD: MGO J 2020.06.06  
 DRTT: FENG X 2020.05.30

NAME: ZK5-24P-1Y-00A(H)  
 DRAWING NO.: ZK5-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 2:1  
 SHEET: 1/1