
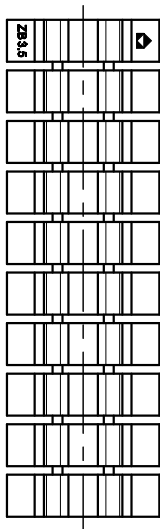



公差/公差 (General Tolerances)(mm)		0.1/10
0	>3	~
~3	>6	~
~6	>10	~
~10	>18	~
~18	>30	~
~30	>50	~
~50	>80	~
~80	>120	~
~120	>180	~
~180	>250	~
~250	>315	~
~315	>400	~
~400	>500	~
~500	>1000	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.80	±0.93
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
±Z		

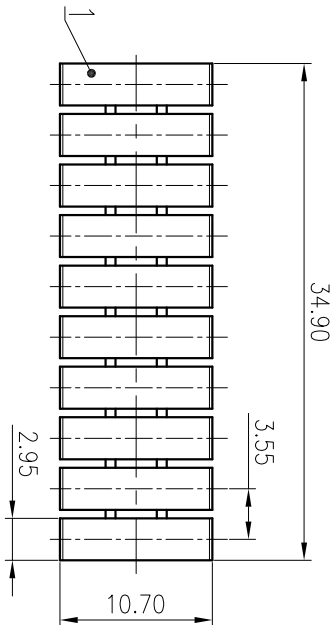

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
	间距/Pitch(mm)/线数范围/Poles		3.55/10P
	使用温度范围/Operating Temperature(°C)		-40~+105
	符合RoHS环保要求/Conform to RoHS		Yes

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.06
 CHKD: Mao J 2020.06.06
 NAME: **DEGSON®** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: ZB3.5-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 REV T1

DRAFT: Ding 2017.12.02

REV	ECON	DESCRIPTION	DRAFT	DATE
1				

SIZE: A4
 (mm)
 (inch)

SCALE: 2:1

SHEET 1/1