
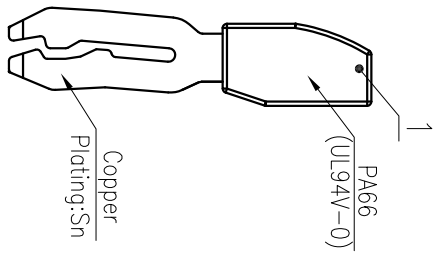
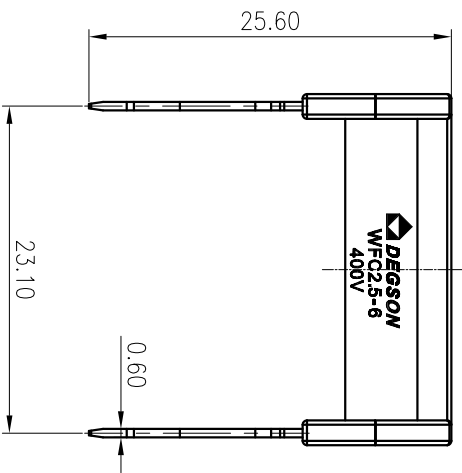


公差带/General Tolerances(mm)		0.1/1/10 ±Z
0	>3	
~	~	~
3	6	~
~	10	~
~	18	~
~	30	~
±0.12	±0.18	±0.22
±0.22	±0.26	±0.31
±0.31	±0.37	±0.57
±0.57	±0.80	±0.93
±0.93	±1.05	±1.15
±1.15	±1.60	±2.20
±2.20	±2.50	±Z

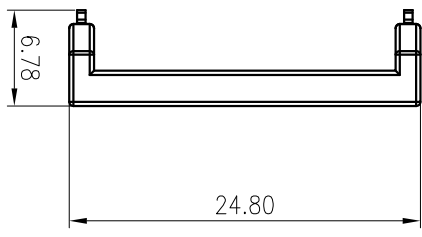

ITEM	NAME OF PART	MATERIAL	NOTES
1	WFC2.5-6-01P-1Y-00A(H)		
间距/Pitch(mm)/线数范围/Poles			23.10/01P
使用温度范围/Operating Temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.06.06
 CHKD: Mao J 2020.06.06
 DRT: Feng X 2020.05.26

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: WFC2.5-6-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 REV: T0
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRT	DATE

1 2 3 4 5 6