




8.2x(N-1)+7.9

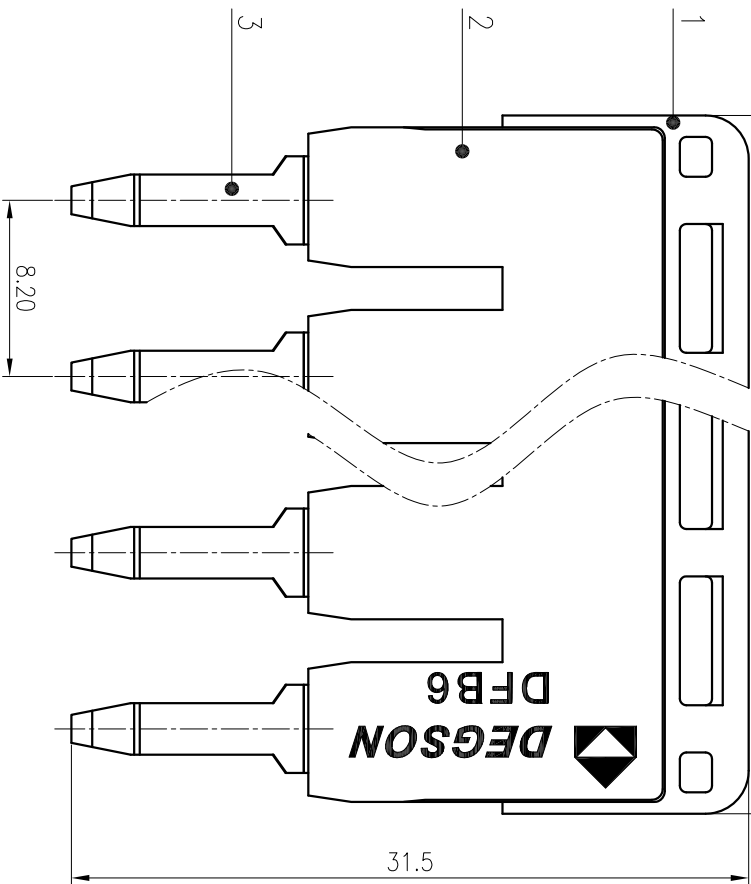

材料公差/General tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±Z	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

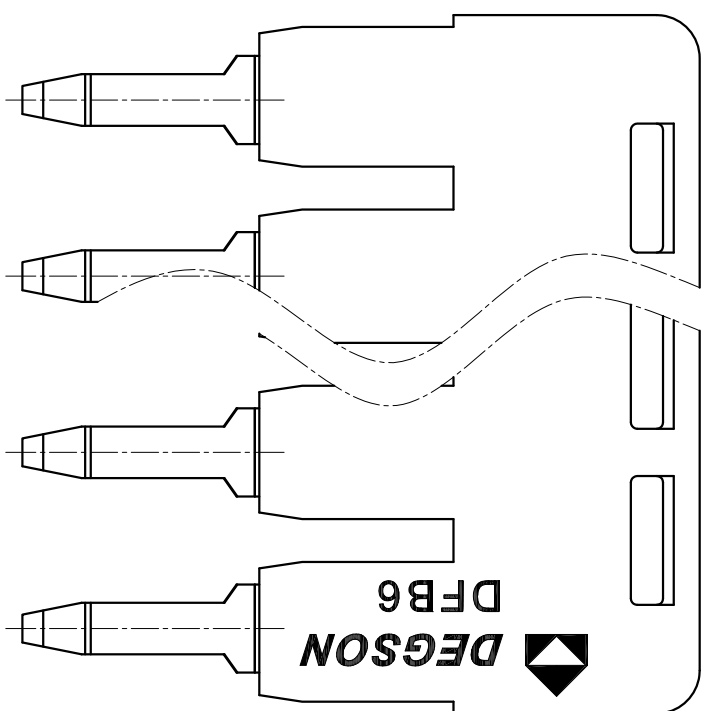

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current	Copper	Sn plated
2	Cover	PAG6	UL94 V-0
1	Housing	PAG6	UL94 V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

APPD:	CHKD:	DRAFT:	SIZE:	TYPE:	SCALE:	REV
LI GL 2020.05.22	Mao J 2020.05.22	Chen K 2020.05.22	A4	CUSTOMER DRAWING	3:1	1/1

MATERIAL:	MAT NO.:	STATUS:	NAME:
/	/	/	DFB6-XXP-1Y-00A(H)

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	/	/	/
EC 标准/EC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
间距/Pitch(mm)/线数范围/Poles	8.2/N=02~10P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DFB6-XXP-1Y-00A(H)

DRAWING NO.: DFB6-C01
TYPE: CUSTOMER DRAWING
SCALE: 3:1
SHEET 1/1