
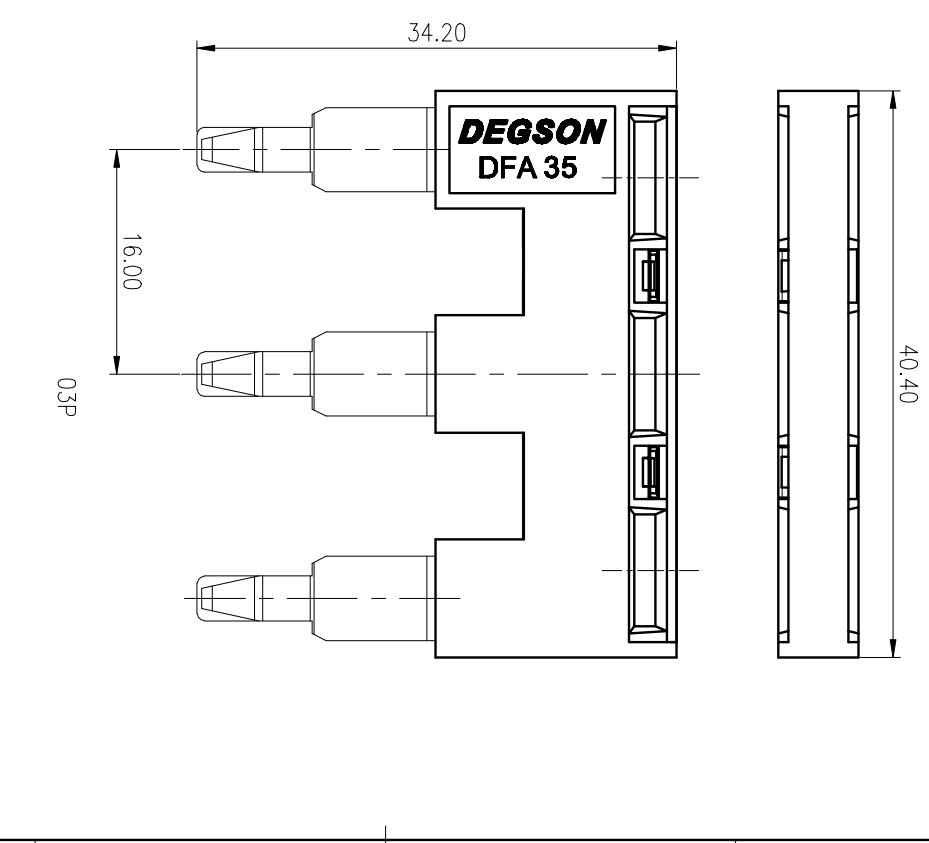
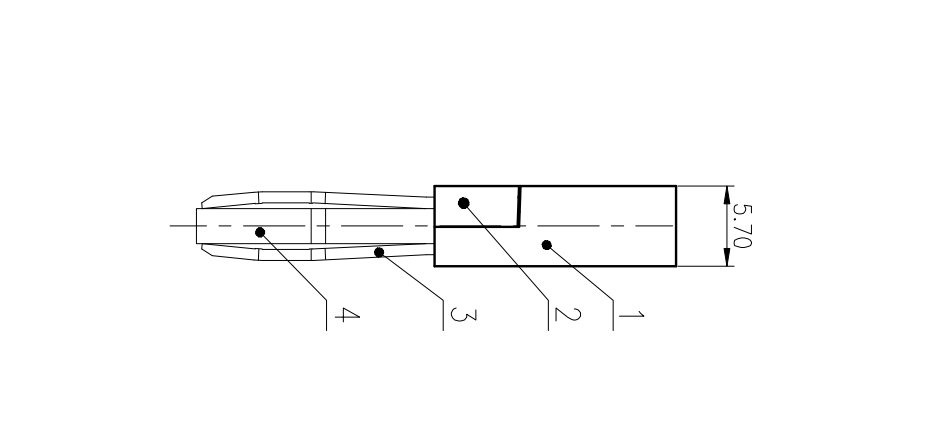


公差等级/General Tolerances(mm)		0.1/1/10 ±Z
0	>3	
~	>3	~
3	6	~
±0.12	±0.18	±0.22
>6	>10	>18
~	~	~
10	18	30
~	~	~
30	50	80
~	~	~
50	80	120
~	~	~
80	120	180
~	~	~
120	180	250
~	~	~
180	250	315
~	~	~
250	315	400
~	~	~
315	400	500
~	~	~
400	500	630
~	~	~
500	630	800
~	~	~
630	800	1000
~	~	~
800	1000	1250
~	~	~
1000	1250	1600
~	~	~
1250	1600	2000

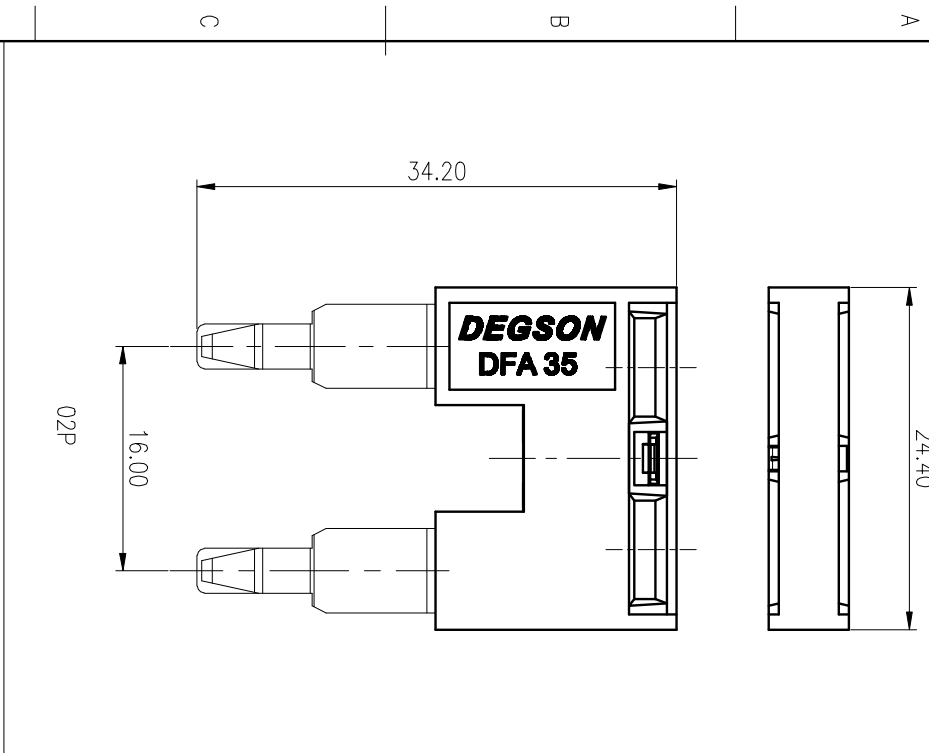

ITEM	NAME OF PART	MATERIAL	NOTES
4	Bridgeware 2	Copper	Sn Plated
3	Bridgeware 1	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				

MATERIAL: /	表面/Pitch (mm)/线宽/厚度/Notes	16.00/02P,03P
MAT NO.: /	使用温度范围/Operating Temperature(°C)	-40~+105
STATUS: /	符合RoHS环保要求/Conform to RoHS	Yes
APPD: Li GL 2020.06.04	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD: Moo J 2020.06.04	DFA35-XXP-1Y-00A(H)	
DRAFT:ZhengQG 2020.06.04	DRAWING NO.: DFA35-C01	
TYPE: CUSTOMER DRAWING	SCALE: 2:1	
SIZE: A4	REV	T1
	SHEET	1/1

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD