
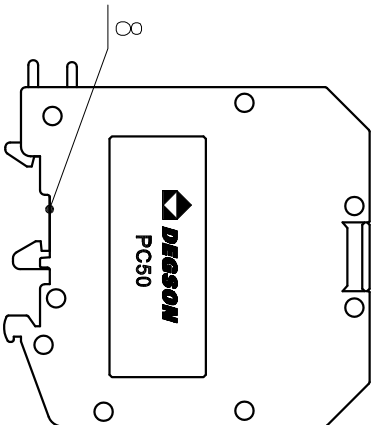
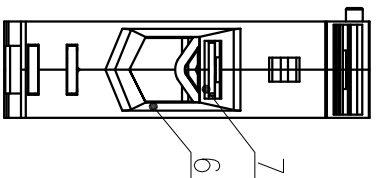
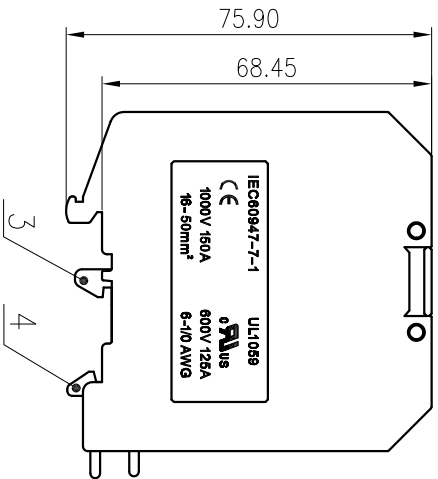


公差表/General Tolerances(mm)		公差表/General Tolerances(mm)	
0	>3	>6	>10
~	~3	~6	~10
3	6	10	18
			30
			50
			80
			120
			180
			250
			315
			400
			500
			>500
			>120
			>180
			>250
			>315
			>400
			>500
			0.1/1/0
			±2

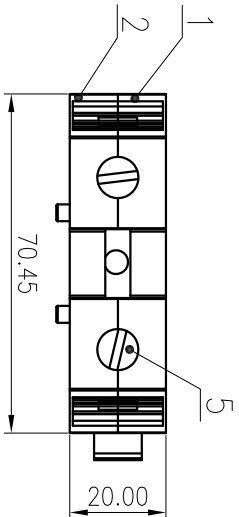

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing 1	PA66	UL94V-0
2	Housing 2	PA66	UL94V-0
3	Slip Component 1	PA66	UL94V-0
4	Slip Component 2	PA66	UL94V-0
5	Screw	Steel	Zn Plated
6	Cage	Iron	Zn Plated
7	Current Carrier	Copper	Sn Plated
8	Spring	Spring steel	Ni Plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1	2	3	4	5

MATERIAL:	
MAT NO.:	/
STATUS:	/
APPD:	Li GL 2020.06.04
CHKD:	Mao J 2020.06.04
DRAFT:	ding 2016.01.15
DRAWING NO.:	PC50-C01
TYPE:	CUSTOMER DRAWING
SCALE:	1:1.5 SHEET 1/1
NAME:	PC50-01P-1Y-00A(H)
NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/125	600/125	600/125
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	1000/150	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N.m/Lb.in)	M6: 2.5/22.15		
线径范围(硬线和软线)/Wire Range(rigid and Flexible)(mm²/AWG)	16~50/6~1/0		
回差/Pitch(mm)/线数范围/Poles	20.0		
剥线长度/Stripping length(mm)	22~23		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		
SURFACE:			