


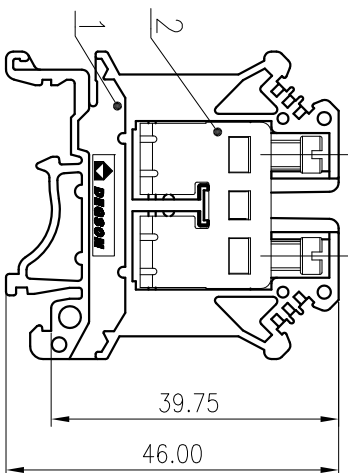


公差/General tolerances(mm)		公差/General tolerances(mm)	
0	>3	>10	>30
~	~	~	~
3	6	18	30
±0.12	±0.18	±0.22	±0.31
±0.26	±0.31	±0.37	±0.57
±0.80	±0.93	±1.05	±1.15
±1.60	±2.20	±2.50	
0.1/10	0.1/10		
±2			

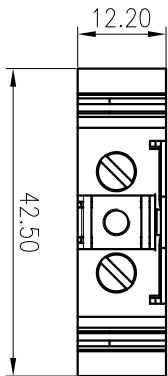

2	Hardware group		
1	Housing	PAG6	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)/Current(A)		600/85	/
IEC 标准/IEC Standard:			/
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/
额定电压/电流/Rated Voltage(V)/Current(A)		800/76	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)		M4, 1.2/10.53	/
线径范围(硬线/软线)/Wire Range(rigid and flexible)(mm ² /AWG)		4~16/12~4	
间距/Pitch(mm)		12.20	
剥线长度/Stripping length(mm)		9~10	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	
标准颜色编号/Standard color number:			
PANTONE / RAL			/
MATERIAL:	SURFACE:		

NINGBO DEGSON ELECTRICAL CO., LTD

PCIK16-01P-1Y-00A(H)

MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	
DRFT: CMZ 2018.05.12	DRAWING NO.: PCIK16-C01
TYPE: CUSTOMER DRAWING	SCALE: 1:1
REV	T1
SHEET	1/1