
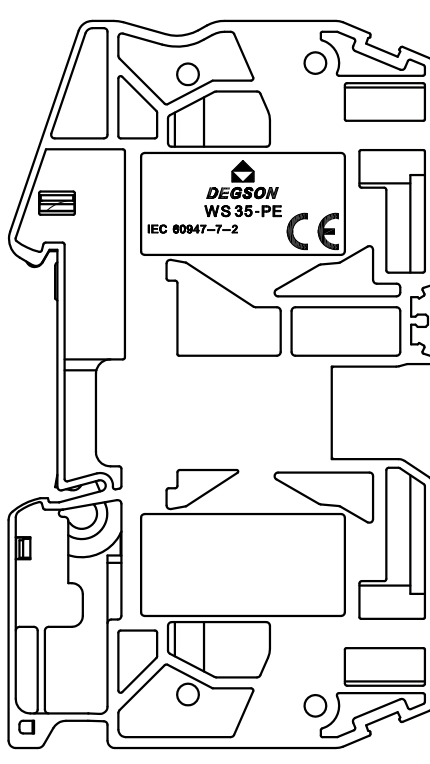
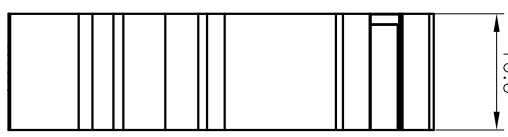


3/4/5

公差表/General tolerances(mm)		0.1/10
0	>3	>6
~	~	~
3	6	10
~	~	~
18	30	50
~	~	~
80	~	~
~	~	~
120	~	~
~	~	~
180	250	315
~	~	~
400	500	>500
~	~	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.80	±0.93
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
±2		

99.90

16.0

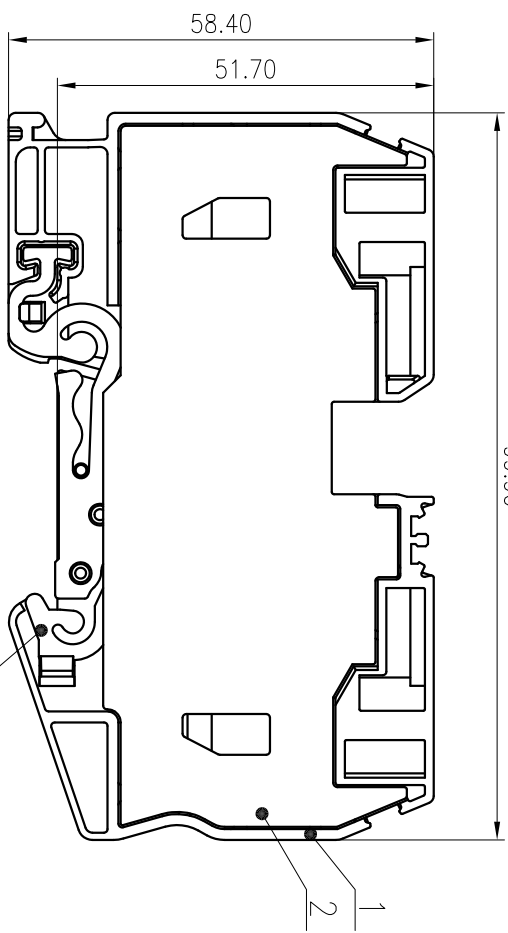

ITEM	NAME OF PART	MATERIAL	NOTES
5	Grounding	Copper Alloy	Sn Plated
5	Spring 2	Stainless Steel	
4	Spring 1	Stainless Steel	
3	Current Carrier	Copper Alloy	Sn Plated
2	Cover	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0

REV	ECN	DESCRIPTION	DRFT	DATE
1				
2				
3				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL 2020.06.05	NAME:	WS35-PE-01P-1C-00A(H)
CHKD:	Mao J 2020.06.05	DRAWING NO.:	WS35-PE-C01
DRFT:	Wang Y 2020.06.05	TYPE:	CUSTOMER DRAWING
SIZE:	A4	SCALE:	1:1
UNIT:	mm	SHEET:	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
EC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	2.5~35/14~2	/	/
剥线长度/Stripping length(mm)	25	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/