
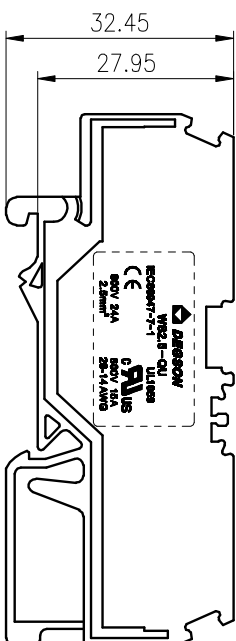


公差/General		公差/General (mm)										公差/General	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50												±Z	

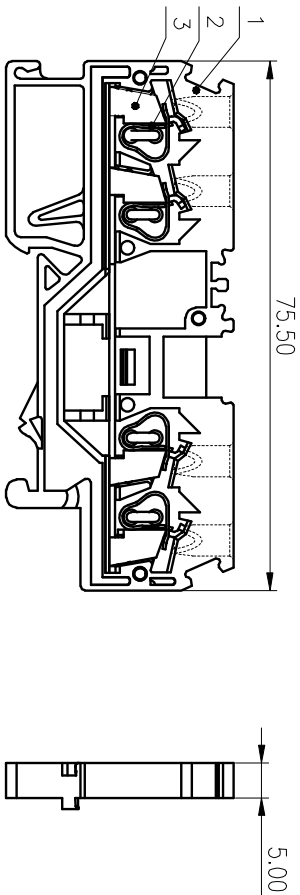

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Copper alloy	Sn plated
2	Spring	Steel	
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL:	SURFACE:
MAT NO.:	
STATUS:	
APPD:	NAME:
CHKD:	
DRAFT:	
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 1:1	SHEET 1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/15	600/15	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	800/24	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	8.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5/28~14/28(Str)		
间距/Pitch(mm)	5.00		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS/符合RoHS/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

WS2.5-QU-01P-1Y-00A(H)

DRAWING NO.:	WS2.5-QU-C01	REV	T1
--------------	--------------	-----	----