
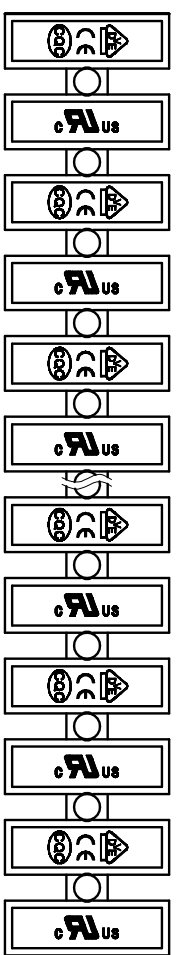

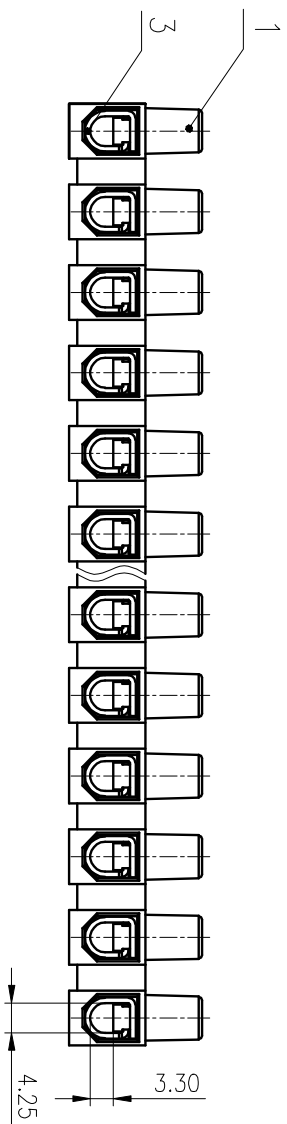


公差/General	公差/Tolerance(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2

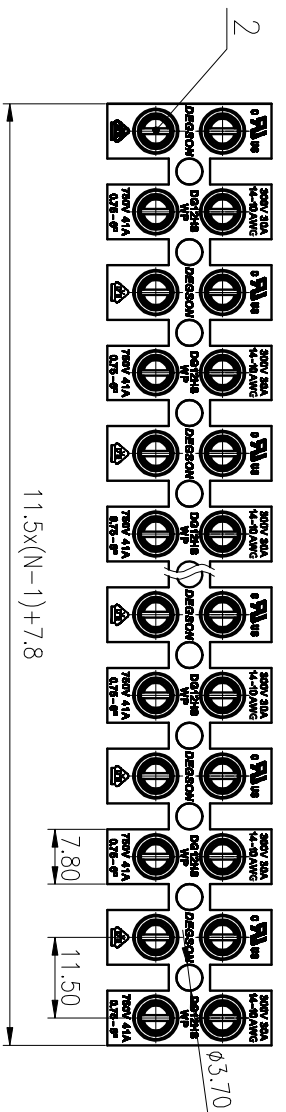

3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard:		B	C
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/30	/	300/70
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	/	750/41	/
额定脉冲电压 (KV) / Rate Impulse Voltage(KV)	/	3.0	/
拧紧扭矩 / Torque Tightening(N·m/Lb.in)	M3.5: 0.8/7.02		
线径范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² /AWG)	0.75~6/14~10		
间距 / Pitch(mm) / 线数范围 / Poles	11.5		9
剥线长度 / Stripping length(mm)			-40~+105
使用温度范围 / Operating temperature(°C)			Yes
符合 RoHS 标准 / Conform to RoHS			

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司

DRAWING NO.: DG12HSWP-1.2-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET
1				2020.05.22				1/1