
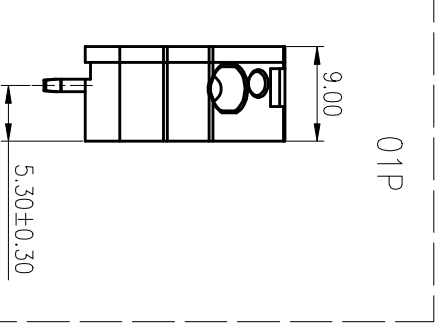
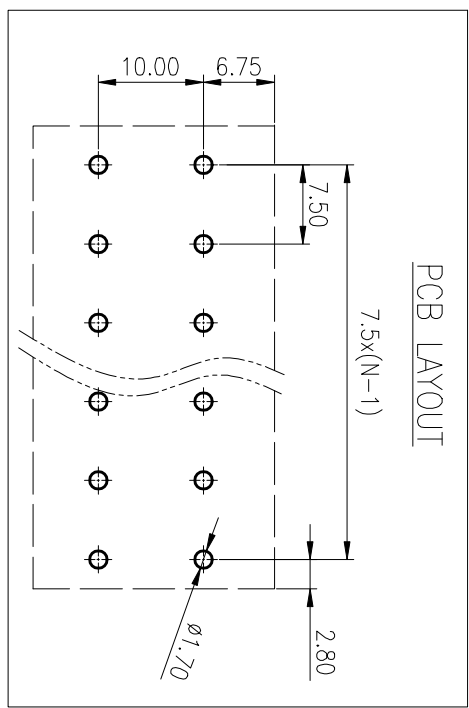
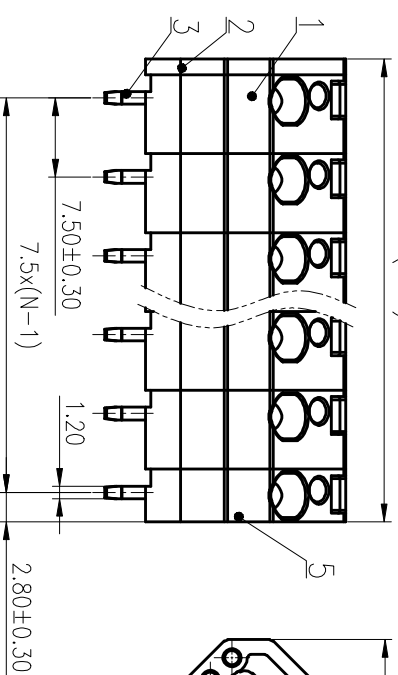
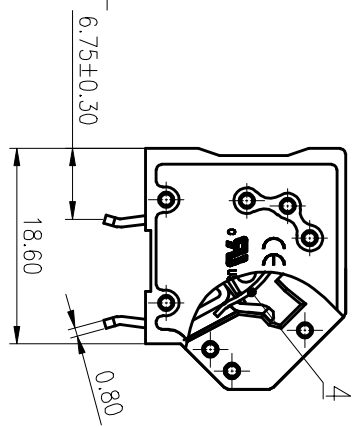


公差等级/General Tolerances(mm)		0.1/10	
0	>3	>10	>180
3	~6	~18	~250
6	10	30	~400
±0.12	±0.18	±0.22	±0.26
±0.26	±0.31	±0.37	±0.57
±0.80	±0.93	±1.05	±1.15
±2.20	±2.50		
			±Z

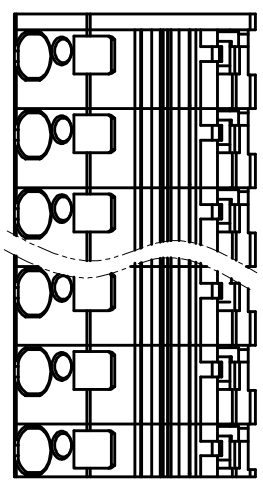

5	Housing 2	PA66	UL94V-0
4	Spring	Stainless steel	/
3	Pin Header	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing 1	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	500/32	320/32	1000/32
额定脉冲电压/Rate Impulse Voltage(KV)	6	6	6
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~4/28~12		
间距/Pitch(mm)/线数范围/Poles	7.50/N=01~16P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL:	/			
MAT NO.:	/			
STATUS:	/			
APPD:	Li GL 2020.06.13			
CHKD:	Ma EK 2020.06.13			
DRAFT:	WWF 2015.04.03			
SIZE:	A4			
TYPE:	CUSTOMER DRAWING			
SCALE:	1.5:1 SHEET			
REV	EN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

DRAWING NO.: **DG262-7.5-C01**

TYPE: CUSTOMER DRAWING

SCALE: 1.5:1 SHEET

REV T4

