


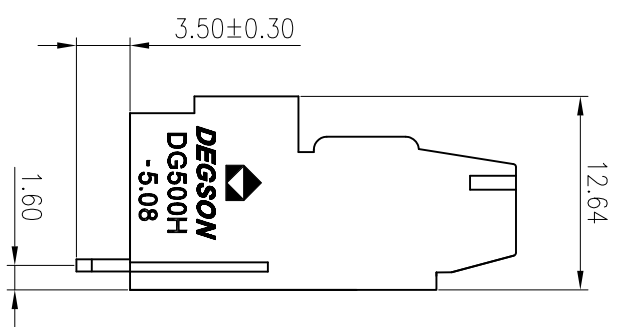



公差/General tolerances(mm)		0.1/10
0	>3	~
~	~	~
3	6	~
~	10	~
~	>6	~
~	>10	~
~	>18	~
~	>30	~
~	>50	~
~	>80	~
~	>120	~
~	>180	~
~	>250	~
~	>315	~
~	>400	~
~	>500	~
~	>500	~
±0.12	±0.18	±2.50
±0.22	±0.26	±2.50
±0.31	±0.37	±2.50
±0.57	±0.80	±2.50
±1.05	±1.15	±2.50
±1.60	±2.20	±2.50
±2.50		±2.50

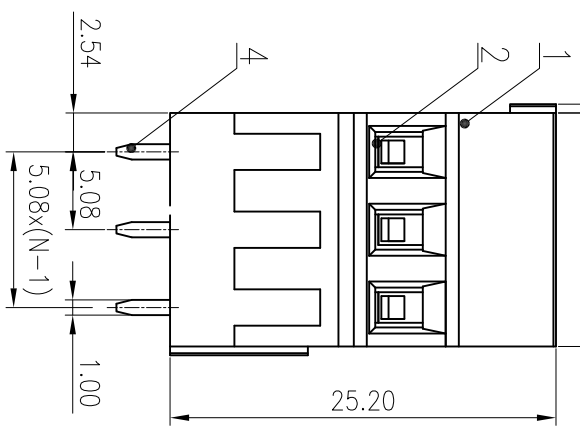

0.58 Ref.  
5.08xN

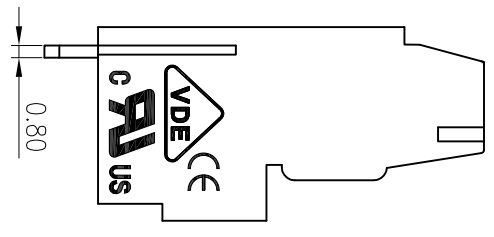

PCB LAYOUT

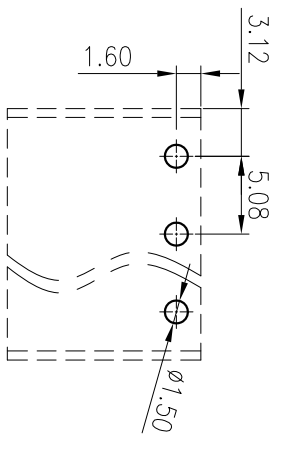

ITEM	NAME OF PART	MATERIAL	NOTES
4	Header	Copper alloy	Sn Plated
3	Screw	Steel	Zn Plated
2	Cage	Copper alloy	Ni Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流 /Rated Voltage(V)/Current(A)	300/20	/	300/10

EC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流 /Rated Voltage(V)/Current(A)	/	250/24	/
工频耐压/Withstanding Voltage(V/min)	/	AC2000	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	/	M3, 0.5/4.45	/
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	/	1.0~2.5/28~12	/
间距/Pitch(mm)/导线范围/Poles	/	5.08/N=02~24P	/
剥线长度/Stripping length(mm)	/	6~7	/
使用温度范围/Operating temperature(°C)	/	-40~+105	/
符合RoHS环保要求/Conform to RoHS	/	Yes	/

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LIGL 2020.06.18
CHKD:	MoEK 2020.06.18
DRFT:	CZ 2017.09.26

NAME:	DEGGSON® NINGBO DEGGSON ELECTRICAL CO., LTD
DRAWING NO.:	DG500H-5.08-XXP-1Y-1000A(H)
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
SHEET	1/1

宁波高松电子有限公司  
NINGBO DEGGSON ELECTRICAL CO., LTD