


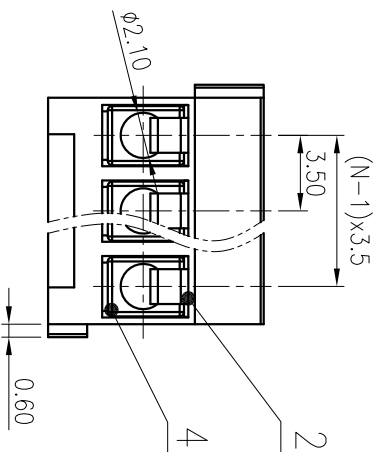



公差/General tolerances(mm)		公差/General tolerances(mm)										公差/General tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.50	±2.20	±2.50	±2

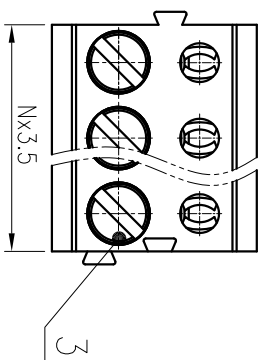

管 中 心
 发 专 用
 2020.05.20
 (仅限内部使用,对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cage	Copper alloy	M2/Ni plated
3	Screw	Steel	M2/Zn plated
2	Clamp	Copper alloy	Ni plated
1	Housing	PBT	UL94V-0

UL 标准/UL Standard: B C D
 额定电压/电流/Rated Voltage(V)/Current(A) 300/8 / 300/8
 IEC 标准/IEC Standard: B C D
 过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2
 额定电压/电流/Rated Voltage(V)/Current(A) / 250/10 /
 I 频耐压/Withstanding voltage(V/1Min) AC2000
 螺丝扭矩/Torque Tightening(N·m/Lb·in) M2: 0.20/1.77
 线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG) 1.0/28~16
 间距/Pitch(mm)/线数范围/Poles 3.5/N=02~24P
 剥线长度/Stripping length(mm) 4-5
 使用温度范围/Operating temperature(°C) -30~+120
 符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD:lan ChH 2020.05.20 NAME: **DEGSON** 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

CHKD:Yu JZh 2020.05.20 DRAWING NO.: DG333K-C02 **DG333K-3.5-XXP-1Y-00A(H)**

DRAFT: CenX 2019.08.03 TYPE: CUSTOMER DRAWING SCALE: 3:1 SHEET 1/1

SIZE:A4 (mm) (inch)

REV	ECN	DESCRIPTION	DRAFT	DATE
1		Change the frame	Wu LF	2020.05.15

1 2 3 4 5 6