
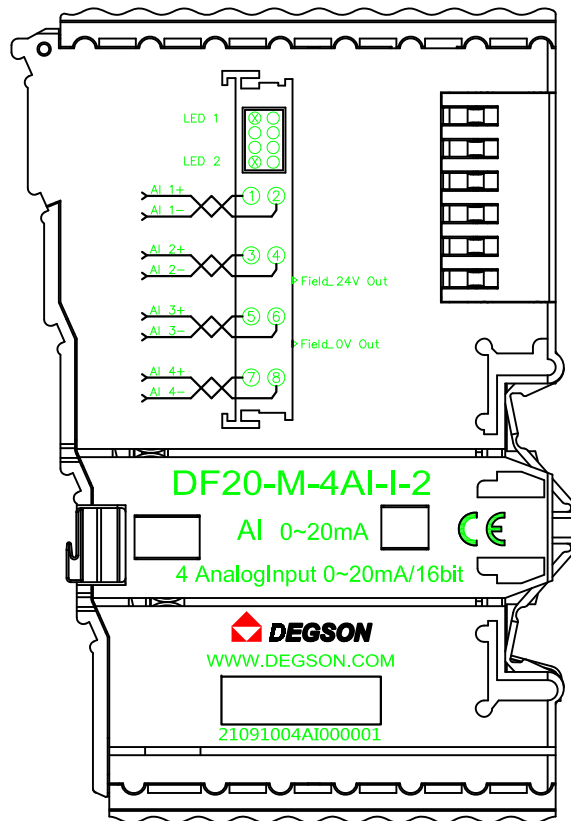


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。未经明确授权，严禁复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

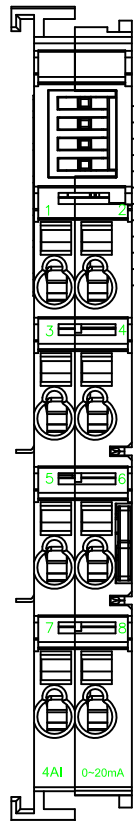

尺寸公差(mm)					0.05/10 ±T*
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

输入通道:	4
系统电源 (输入电压/电流消耗):	5VDC/110mA
输入信号类型:	差分
输入信号范围:	0~20mA
测量范围显示:	0~65535
分辨率/精度:	16bit/0.2%
采样频率:	可配置, 最大 1KHz
输入阻抗:	100Ω
模块故障报警:	支持
隔离耐压:	500V
振动测试:	符合EN60068-2-6标准
冲击测试:	符合EN60068-2-27标准
电磁兼容测试:	符合EN61000-4标准
防护等级:	IP20
工作温度:	-25~+60℃
存储温度:	-40~+85℃
相对湿度:	95%, 无冷凝
尺寸规格:	100mm*12mm*67mm
印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking, printing content is clear, no broken line, ect	

条形码备注及示例:

条形码区域为长方形区域:

21091004AI000001

生产日期 型号 流水码

MATERIAL:	/	SURFACE:	/
MAT.NO.:	30050000281	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	Description: DF20-M-4AI-I-2	
APPD:		DRAWING NO.:	200015729
CHKD:		REV:	00
DRFT:	luo DP 2021.08.31	TYPE:	PRODUCT DRAWING
SIZE:	A4	SCALE:	1:1
SHEET		1/1	

REV	ECN	DESCRIPTION	DRFT	DATE