

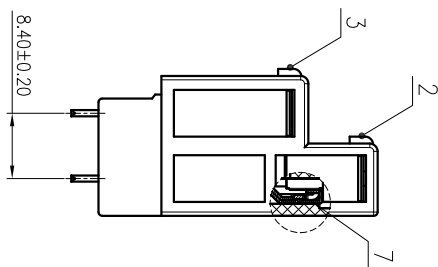
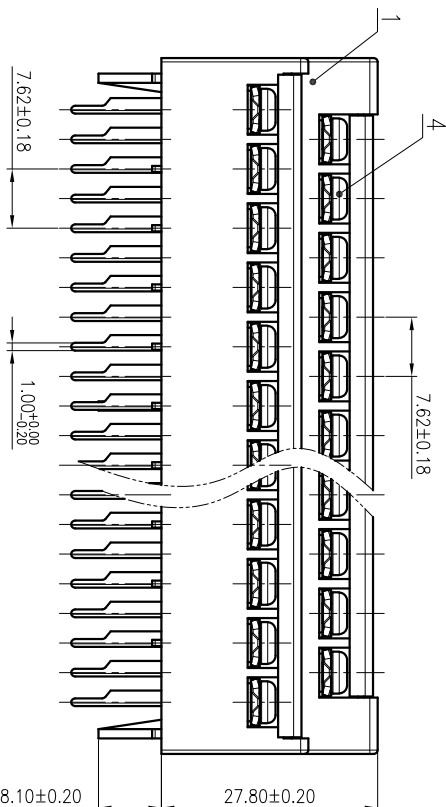


Table_1

Poles	Dim L
19	81.88±0.30
21	89.50±0.30
29	119.50±0.30

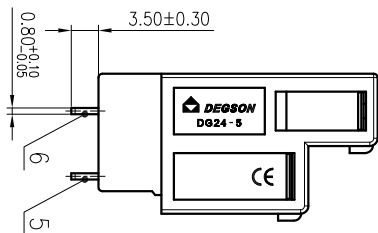

PCB LAYOUT

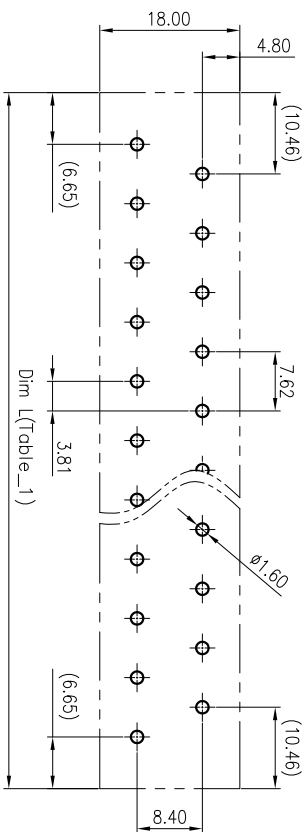

尺寸表/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.00	±1.25	±1.51	±1.60	±2.20
±0.10	±0.15	±0.20	±0.25	±0.30	±0.35	±0.50	±0.70	±0.90	±1.10	±1.40	±1.60	±2.00

ITEM	NAME OF PART	MATERIAL	NOTES
7	Pin Header Fastener	SPCC	M3/Zn Plated
6	Pin Header Long	Copper	Sn Plated
5	Pin Header Short	Copper	Sn Plated
4	Screw	Steel	M3/Ni Plated
3	Cover 2	PC	UL94V-2
2	Cover 1	PC	UL94V-2
1	Housing	PBT	UL94V-0

UL 标准/UL Standard: B C D
 额定电压/电流/Rated Voltage(V)/Current(A) 300/8 / /
 工频耐压/Withstanding Voltage AC2500V/1Min / /
 螺丝扭矩/Torque Tightening(Lb.in) M3.4.5(Max: 1.3.3) / /
 线在范围(硬线和软线)/Wire Range(rigid and flexible)(AWG) 22~14 / /
 间距/Pitch(mm)/线数范围/Poles 7.62/N=19,21,29P / /
 使用温度范围/Operating temperature(C) -30~+120 / /
 符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: / SURFACE: /
 MAT NO.: /
 STATUS: /
 APPD: Ian CHH 2021.06.08
 CHKD: Yu Jzh 2021.06.08
 DFT: GWG 2016.11.17
 DRAWING NO.: DG24-5-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

NINGBO DEGSON ELECTRICAL CO., LTD
 DG24-5-XXP-1Y-00A(H)
 DATE: /
 REV: /

REV	ECN	DESCRIPTION	DFT	DATE