
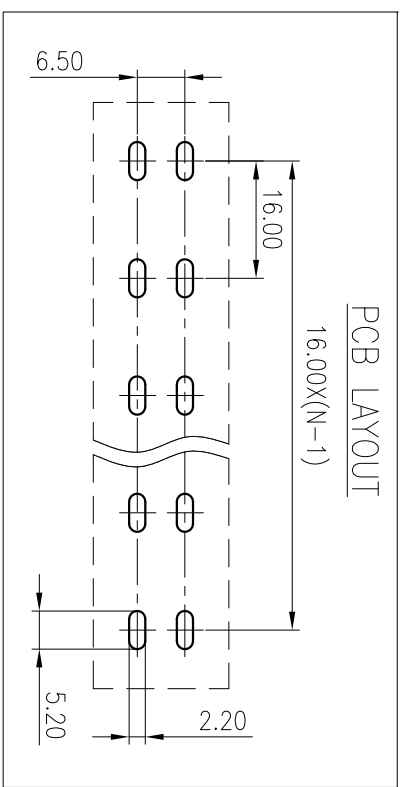
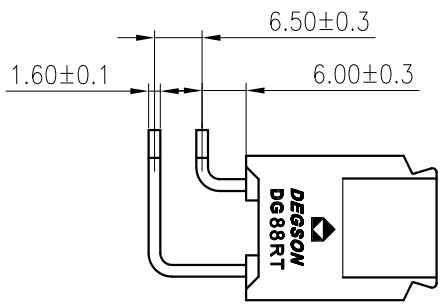
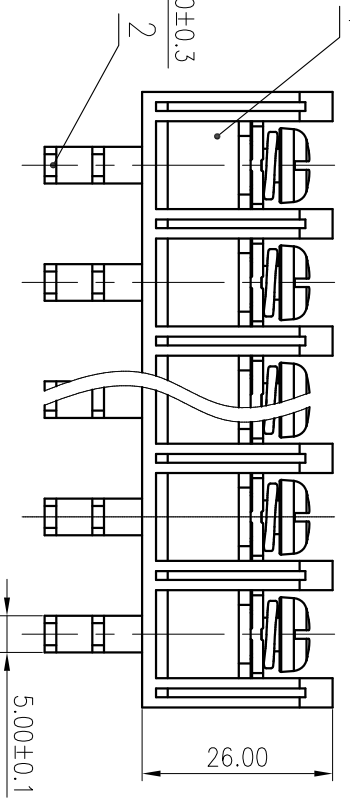


公差/General Tolerances(mm)		公差/General Tolerances(inch)	
0	>3	>6	>18
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	~	~	~
±Z	±Z	±Z	±Z

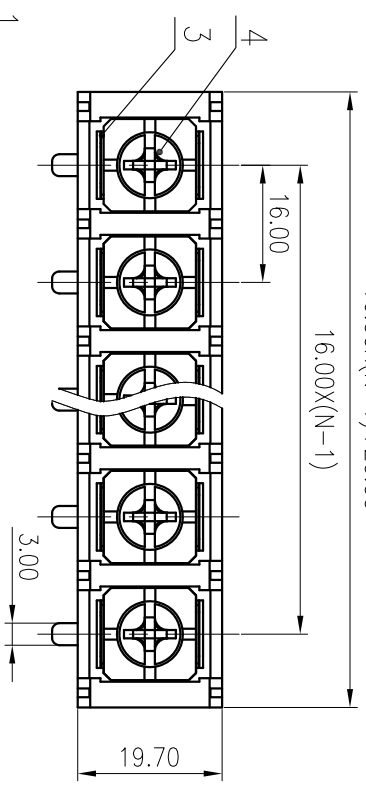

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screws	Steel	M6/Ni Plated
3	Nut	Steel	M6/Ni Plated
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)	600/1000	600/1000	600/5
额定电流/电流/Rated Current(A)	1000/101	1000/101	1000/101
IEC 标准/IEC Standard:	过压类别/Overvoltage Category/污染等级/ Pollution Degree		
额定电压/电压/Rated Voltage(V)	III/3	III/2	I/2
额定电流/电流/Rated Current(A)	1000/101	1000/101	1000/101
额定脉冲电压/电压/Rated Impulse Voltage(KV)	8	8	8
额定脉冲电流/电流/Rated Impulse Current(KV)	8	8	8
额定扭矩/Torque Tightening(N·m/Lb·in)	M6, 2.42/22		
线径范围/硬线和软线/Wire Range(rigid and flexible)(mm ² /AWG)	6~25/10~3		
可抽/Pitch(mm)/线数范围/Poles	16/N=02~12P		
剥线长度/Stripping length(mm)	13~14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG88RT-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

REV	ECN	DESCRIPTION	DRFT	DATE