


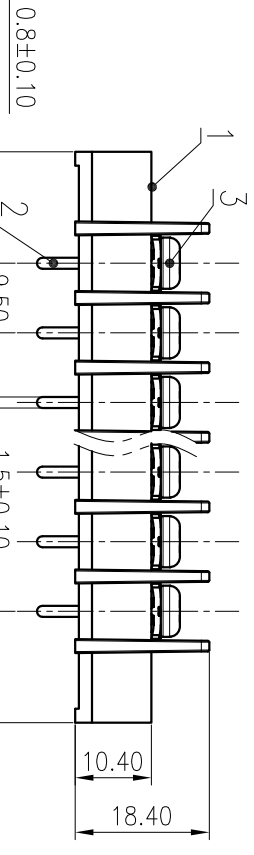

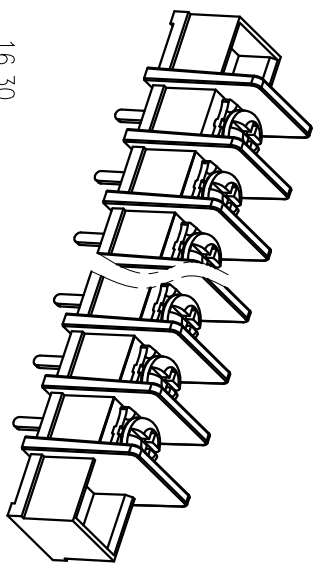


Pitch range in mm	Nominal dimension range					
	In mm		In mm			
6	over	over	over	over	over	over
10	to	to	to	to	to	to
15	to	to	to	to	to	to
24	to	to	to	to	to	to
30	to	to	to	to	to	to
60	to	to	to	to	to	to
100	to	to	to	to	to	to
150	to	to	to	to	to	to

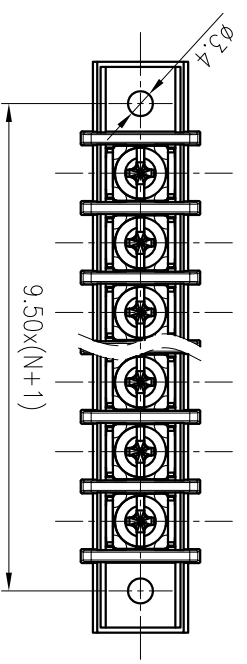

PCB LAYOUT

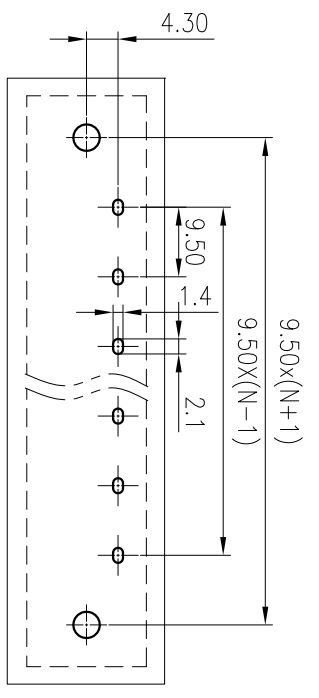

3	Screw	Steel	Ni Plated	
2	Pin header	Copper alloy	Sn Plated	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/25	/	300/10	
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)	500/32	600/32	1000/32	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6	
额定脉冲电流(KV)/Rate Impulse Current(KV)	6	6	6	
额定扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.34~4/22~12			
可距/Pitch(mm)/线数范围/Poles	9.50/N=02~24P			
剥线长度/Stripping length(mm)	8			
使用温度范围/Operating temperature(°C)	-40~+105			
符合RoHS环保要求/Conform to RoHS	Yes			

MATERIAL: /

MAT NO.: /

STATUS: work

APPD: /

CHKD: /

DRAFT: Desinly 2019.05.29

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG45S-A-XXP-1Y-00A(H)

DRAWING NO.: DG45S-C03

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE