
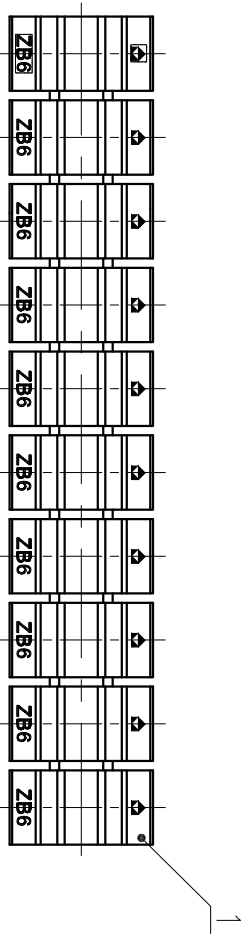



公差表/General tolerances(mm)		公差带
0	~>3	~
~>3	~>6	~
~>6	~>10	~
~>10	~>18	~
~>18	~>30	~
~>30	~>50	~
~>50	~>80	~
~>80	~>120	~
~>120	~>180	~
~>180	~>250	~
~>250	~>315	~
~>315	~>400	~
~>400	~>500	~
~>500	~>630	~
~>630	~>800	~
~>800	~>1000	~
±0.12	±0.18	±0.22
±0.22	±0.26	±0.31
±0.31	±0.37	±0.51
±0.51	±0.60	±0.93
±0.93	±1.05	±1.15
±1.15	±1.60	±2.20
±2.20	±2.50	±2.50

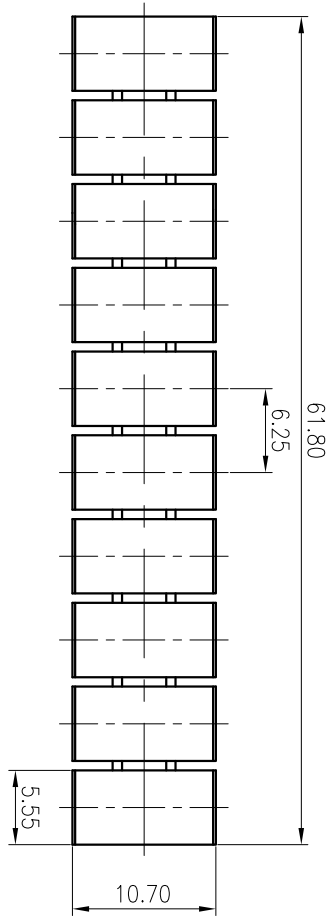

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles		6.25/10P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS标准/Conform to RoHS		Yes	

MATERIAL:		SURFACE:	
MAT NO.:	/		
STATUS:	/		
APPD:	LI GL 2020.06.06	NAME: DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
CHKD:	Mao J 2020.06.06	DRAWING NO.: ZB6-10P-1Y-00A(H)	
DRT:	Feng X 2020.05.30	DRT: C01	

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET
1					mm (inch)			1/1

A B C D

A B C D

1

2

3

4

5

6