


公差表/General tolerances(mm)		0.1/10
0	>3	±2
~	>6	±2
3	~ 6	±2
6	~ 10	±2
10	~ 18	±2
18	~ 30	±2
30	~ 50	±2
50	~ 80	±2
80	~ 120	±2
120	~ 180	±2
180	~ 250	±2
250	~ 315	±2
315	~ 400	±2
400	~ 500	±2
500	>500	±2
±0.12	±0.18	±2
±0.22	±0.28	±2
±0.31	±0.37	±2
±0.57	±0.80	±2
±1.05	±1.19	±2
±1.60	±2.20	±2
±2.50		±2

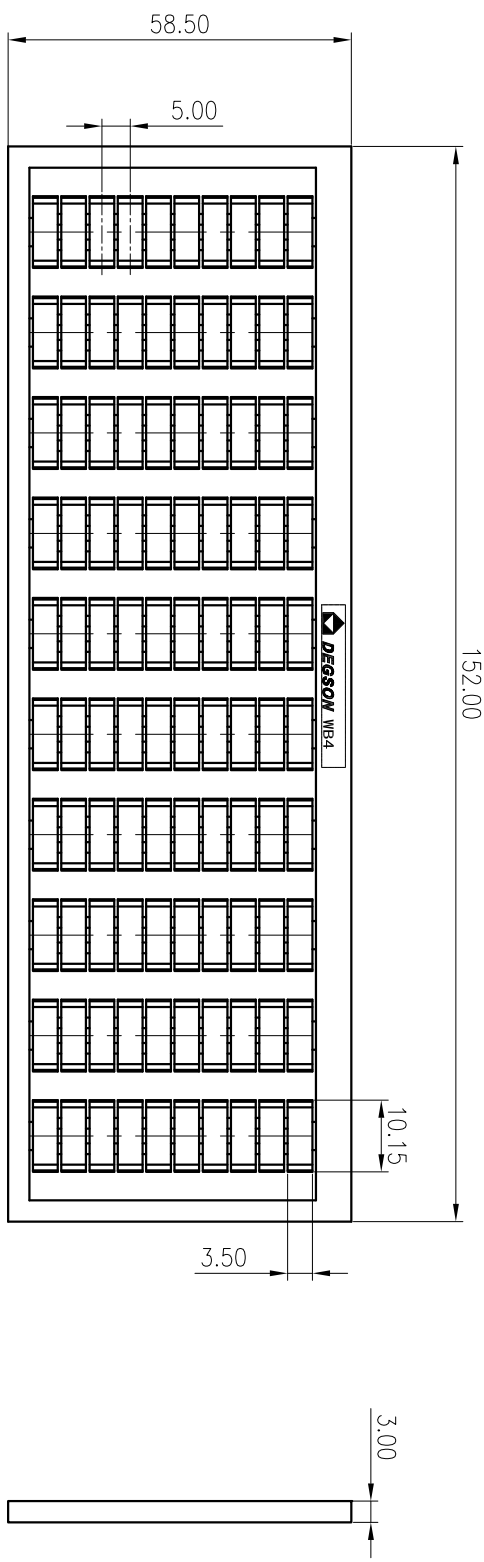

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
间距/Pitch(mm)/线数范围/Poles: 5.0/100P			
使用温度范围/Operating temperature(°C): -40~+105			
符合RoHS环保要求/Conform to RoHS: Yes			

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.06.06
 CHKD: Mao J 2020.06.06
 DRFT: XMY 2015.02.26

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: WB5-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 REV T1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1				

1 2 3 4 5 6