


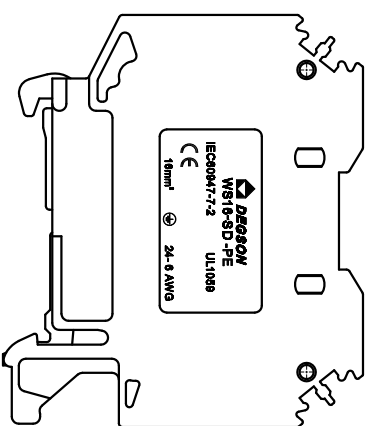


标注公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
		±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z



58.50

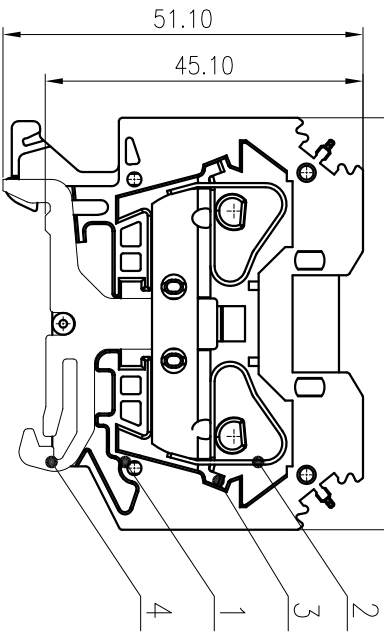

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定电涌电流(KV)/Rate Impulse Voltage(KV)	8.0	/	/
导线范围 (硬线和导线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~16/24~6		
间距/Pitch(mm)	12.0		
剥线长度/Stripping length(mm)	17		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL			
SURFACE:	/		

4	Ground Contact	Copper Alloy	Sn Platte
3	Current Carrier	Copper	Sn Platte
2	Shrapnel	Stainless Steel	
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRT	DATE
1								

MATERIAL:	/	
MAT NO.:	/	
STATUS:	/	
APPD:	Li QL 2020.06.05	NAME: 宁波高松电子有限公司
CHKD:	Mao J 2020.06.05	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
DFT:	Wang Y 2020.06.05	DRAWING NO.: WS16-SD-PE-C01
		TYPE: CUSTOMER DRAWING

	SIZE: A4	mm (inch)	SCALE: 1:1	SHEET	REV	DATE	
				1/1	TO-1		