
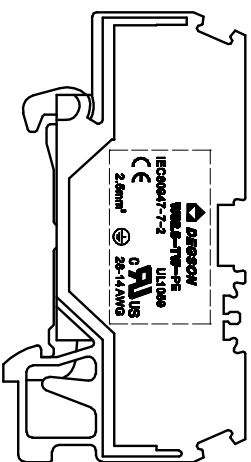



规格公差/General Tolerances(mm)	0	2.5	2.8	3.2	3.6	4.0	4.5	5.0	5.6	6.3	7.0	8.0	9.0	10.0	11.0	12.5	14.0	16.0	18.0	20.0	25.0	30.0	36.0	40.0	45.0	50.0	60.0	70.0	80.0	90.0	100.0	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50																			

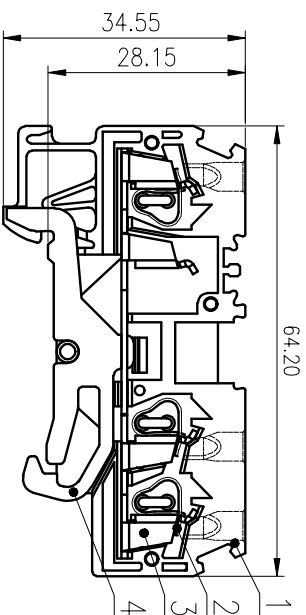

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current contact	Copper alloy	Sn Plated
3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.00	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/28~14(So)		
厚度/Pitch(mm)	5.00		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LiGL 2020.05.27
 CHKD: MaoJ 2020.05.27

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
WS2.5-TW-PE-01P-1C-00A(H)

DRAWING NO.: WS2.5-TW-PE-C01
 DRAFT: ZhengQG 2020.05.27
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

SIZE: A4
 (mm) (inch)