
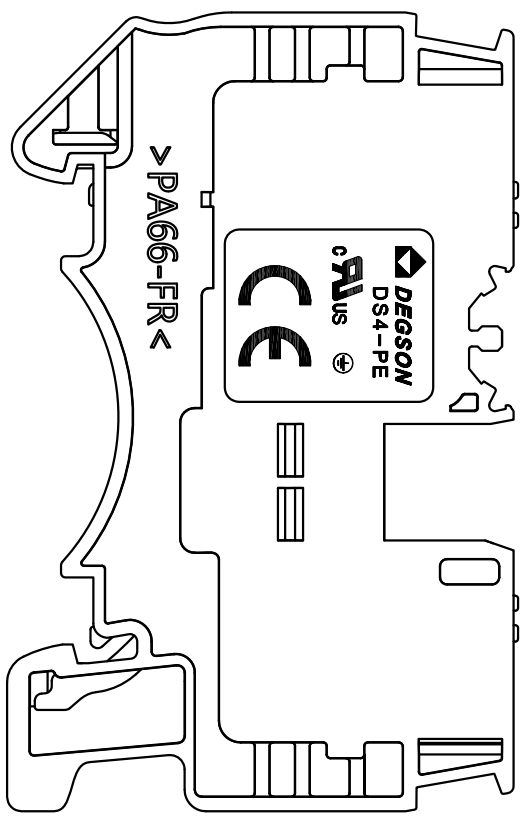


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>10
~	>18	>30	>50
3	6	10	18
	30	50	80
	120	180	250
	315	400	500
	>500		
	±0.12	±0.18	±0.22
	±0.26	±0.31	±0.37
	±0.57	±0.80	±1.05
	±1.15	±1.50	±2.20
	±2.50		
	±Z		

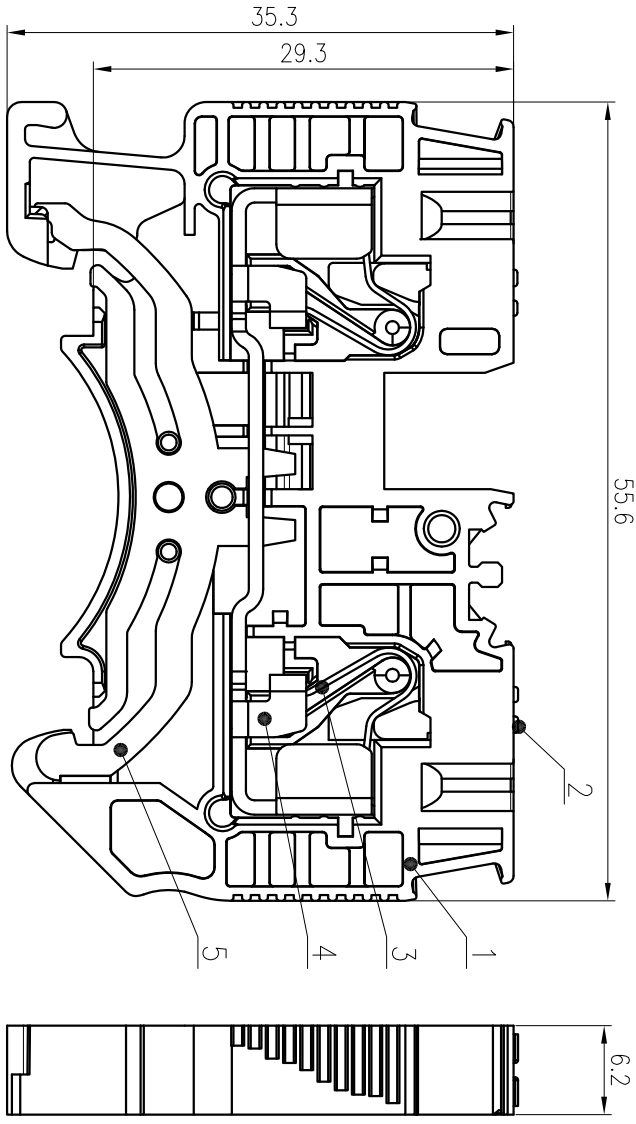

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线/软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4.6(S01)/24~10		
间距/Pitch(mm)	6.2		
剥线长度/Stripping length(mm)	11~13		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: / STATUS: / APPD: LI GL 2020.04.20 NAME: **DEGSON** 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

CHKD: Mao J 2020.04.20 CHKD: Chen K 2020.04.20 DRAWING NO.: DS4-PE-001 NAME: **DS4-PE-01P-1C-00A(H)**

DRAFT: Chen K 2020.04.20 TYPE: CUSTOMER DRAWING SCALE: 2:1 SHEET 1/1 REV DO-3

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94 V-0
2	Button	PA66-GF	UL94 V-0
3	Spring	Stainless steel	
4	Current Carrier	Copper	Sn plated
5	Grounding	Copper alloy	Sn plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				