


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)													公差等级/General Tolerances(mm)
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/0	
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z	
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±Z	
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														±Z	

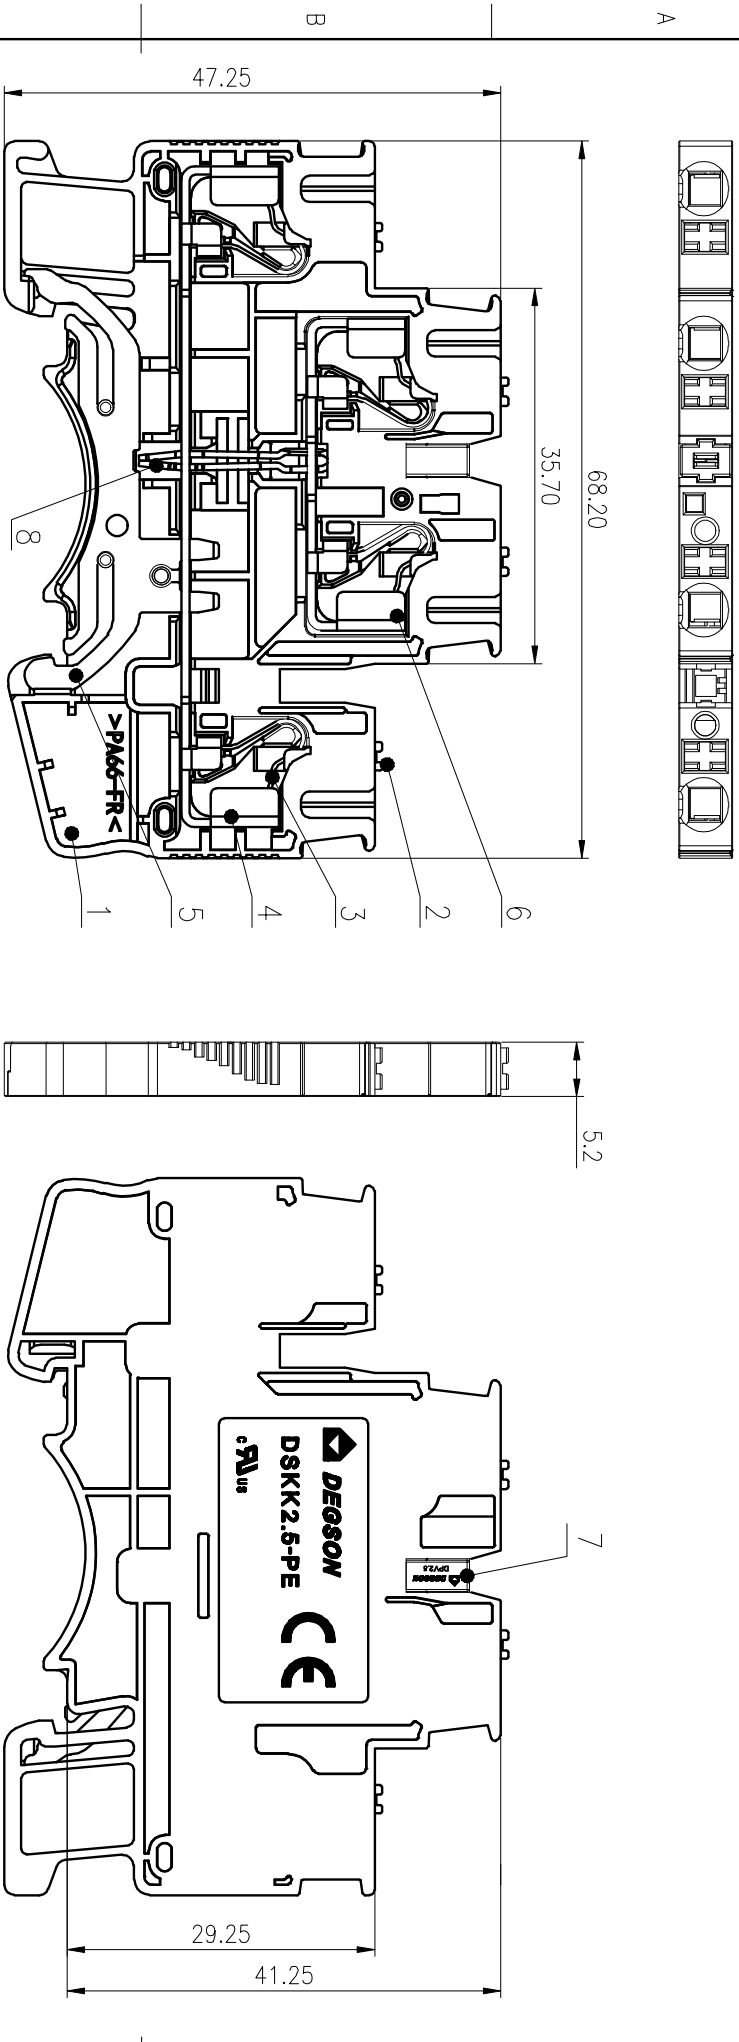

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing 1	PA66	UL94 V-0
2	Button	PA66-GF	UL94 V-0
3	Spring	Stainless steel	/
4	Current carrier 1	Copper	Sn Plated
5	Grounding	Copper alloy	Sn Plated
6	Current carrier 2	Copper	Sn Plated
7	Housing 2	PA66	UL94 V-0
8	Current carrier 3	Copper	Sn Plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DSKK2.5-PE-01P-1C-00A(H)	
APPD:	LiGL 2020.05.26	NAME:	
CHKD:	Mdo J 2020.05.26	DRAWING NO.:	
DRAFT:	Chenk 2019.11.13	TYPE: CUSTOMER DRAWING	
SIZE:	A4	SCALE:	1:1
DRAWING NO.:		REV	T1
DRAWING NO.:		SHEET	1/1

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5&4(S0)/26~12	/	/
同层/Pitch(mm)	5.20	/	/
引线长度/Stripping length(mm)	11~12	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS/符合RoHS要求/Conform to RoHS	Yes	/	/