


公差/General		公差/General (mm)										公差/General	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
F0.12	F0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

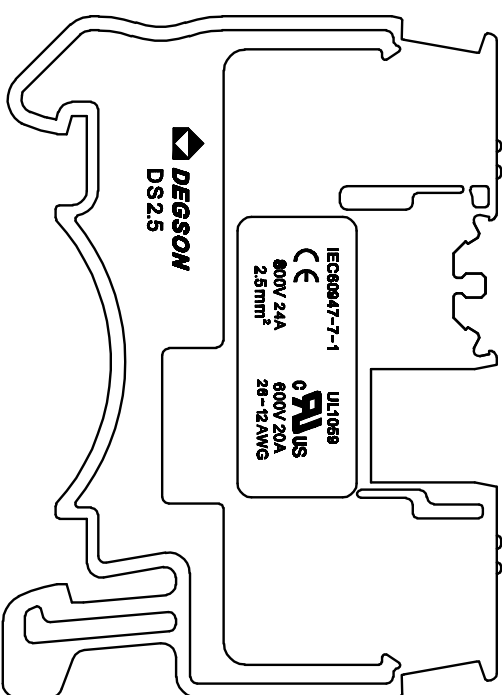

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66-GF	UL94V-0
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: Li GL 2020.04.02	NAME: DS2.5-01P-1Y-00A(H)
CHKD: Moo J 2020.04.02	DRAWING NO.: DS2.5-C01
DRT:Wang LX 2020.04.02	TYPE: CUSTOMER DRAWING
SIZE: A4	SCALE: 2:1
	SHEET 1/1

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	600/20	600/20	600/7.5
IEC 标准 / IEC Standard:			
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	/	/
额定电压/电涌 / Rated Voltage(V)/Current(A)	800/24	/	/
额定电涌电压 (KV) / Rate Impulse Voltage(KV)	8.0		
线径范围 (硬线/软线) / Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5&4(SOL)/26~12		
厚度/Pitch(mm)	5.2		
剥线长度/Stripping length(mm)	10~12		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合RoHS要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	/		
PANTONE / RAL	/		

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD  
宁波高松电子有限公司