

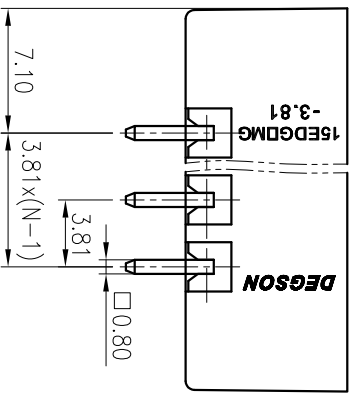
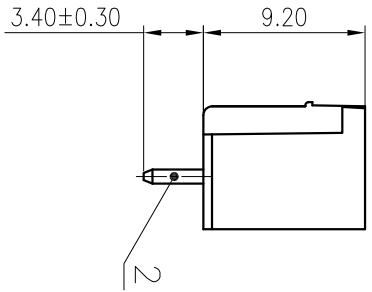
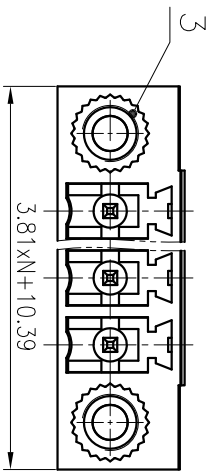
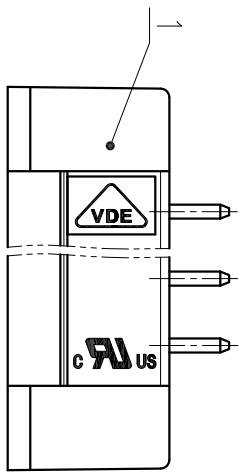


PCB LAYOUT

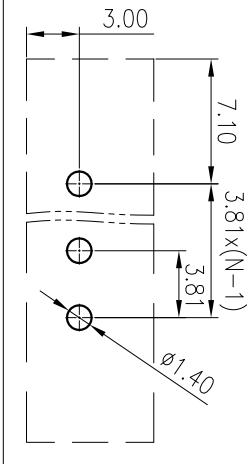

公差/General Tolerances (mm)		公差/General Tolerances (mm)										公差/General Tolerances (mm)		
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±0.1/±1.0
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±0.7

3	Nut	Copper alloy	
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/Rated Voltage(V)/Current(A)		300/8	300/8
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	250/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	2.5
间距/Pitch(mm)/线数范围/Poles		3.81/N=02~20P	
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: Lan ChH 2020.05.23
 CHKD: /

NAME: 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

15EDGVMG-3.81-XXP-1Y-00A(H)
 DRAWING NO.: 15EDGVMG-3.81-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

1	2	3	4	5	6