




The first pin will bulge to the up

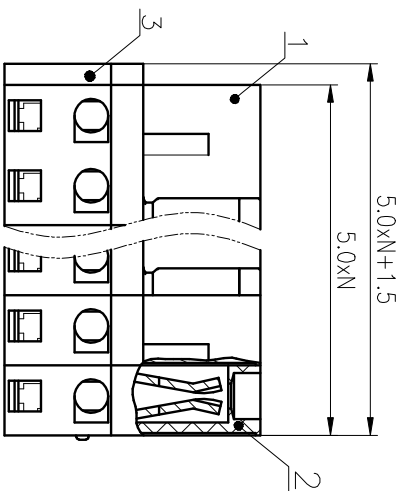

精度等级/General Tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±Z	
0.1/1/0	

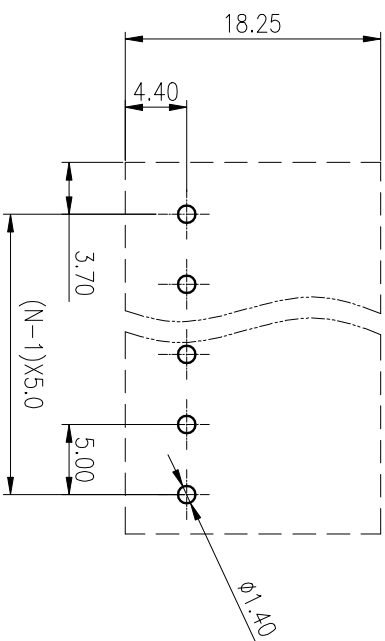


PCB LAYOUT

Bending the pin-header after assembling

ITEM	NAME OF PART	MATERIAL	NOTES
4	Clamp	Copper alloy	Sn plated
3	Cover	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌 /Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 /IEC Standard:			
过压类别 /Overvoltage Category /污染等级 /Pollution Degree	III/3	III/2	II/2
额定电压/电涌 /Rated Voltage(V)/Current(A)	320/20	/	/
额定电涌电压 /Rate Impulse Voltage(KV)	4.0	/	/
线径范围(硬线和软线) /Wire Range(rigid and flexible)(mm² /AWG)	/	/	/
间距 /Pitch(mm) /线距范围 /Poles	5.0 /N=02~24P		
剥线长度 /Stripping length(mm)	6~7		
使用温度范围 /Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		
标准颜色编号 /Standard color number:	PANTONE 428C		
PANTONE /RAL	/		

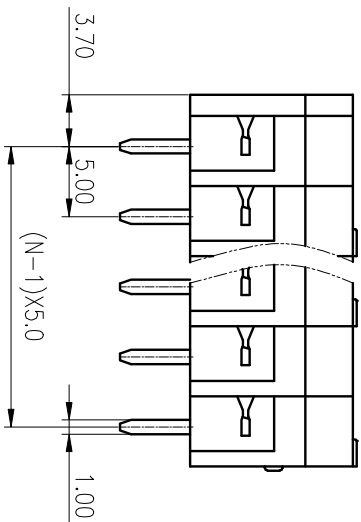

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
APPD:			
CHKD:			
DRAWING NO.:	8EDGA-5.0-C02	TYPE:	CUSTOMER DRAWING
SCALE:	2:1	SHEET:	1/1

8EDGA-5.0-XXP-11-01A(H)

NINGBO DEGSON ELECTRICAL CO., LTD

宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				