
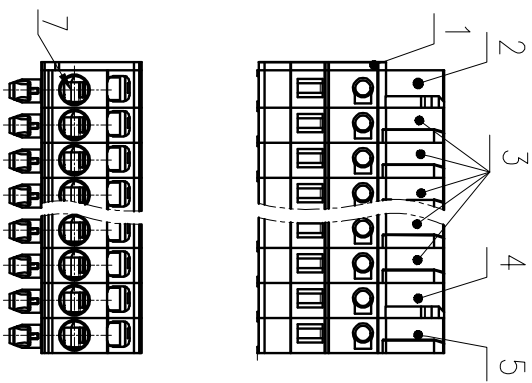


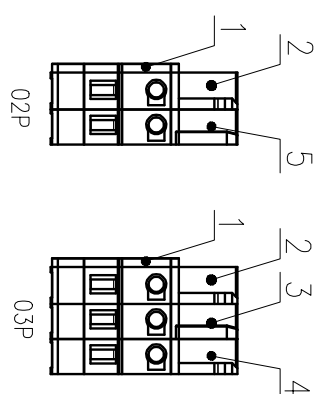


Pitch Range	In mm	Nominal Dimension	Range In mm	Over	Under
Over	6	10	30	60	100
TO	10	24	30	60	100
Over	10	24	30	60	100
TO	10	24	30	60	100
Over	150	150	150	150	150
TO	150	150	150	150	150

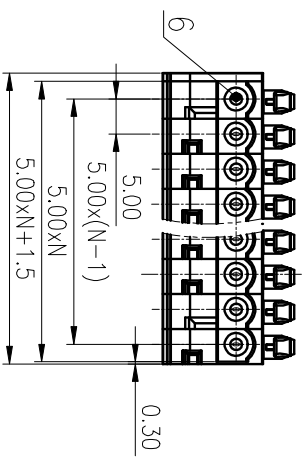

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side housing 1	PA66	UL94V-0
3	Side housing 2	PA66	UL94V-0
4	Side housing 2	PA66	UL94V-0
5	Side housing 2	PA66	UL94V-0
6	Clamp	Copper	Sn plated
7	Spring	Stainless steel	

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300	151	150/151
IEC 标准 / IEC Standard:	B	C	D
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	III / 2	II / 2
额定电压/电涌 / Rated Voltage(V)/Current(A)	320 / 20	/	/
额定脉冲电压 / Rate Impulse Voltage(KV)	4	/	/
线芯范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
间距 / Pitch(mm) / 剥线长度 / Stripping length(mm)	5.0 / N=02~24P		
使用温度范围 / Operating temperature(°C)	9~10		
符合RoHS环保要求 / Conform to RoHS	-40~+105		
标准颜色编号 / Standard color number:	Yes		
PANTONE	PANTONE 428C		

MATERIAL: / SURFACE: /

NINGBO DEGSON ELECTRICAL CO., LTD

8EDGKD-5.0-XXP-11-01A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE

DRFT	SIZE: A4	SCALE: 1:1	TYPE: CUSTOMER DRAWING	SHEET