
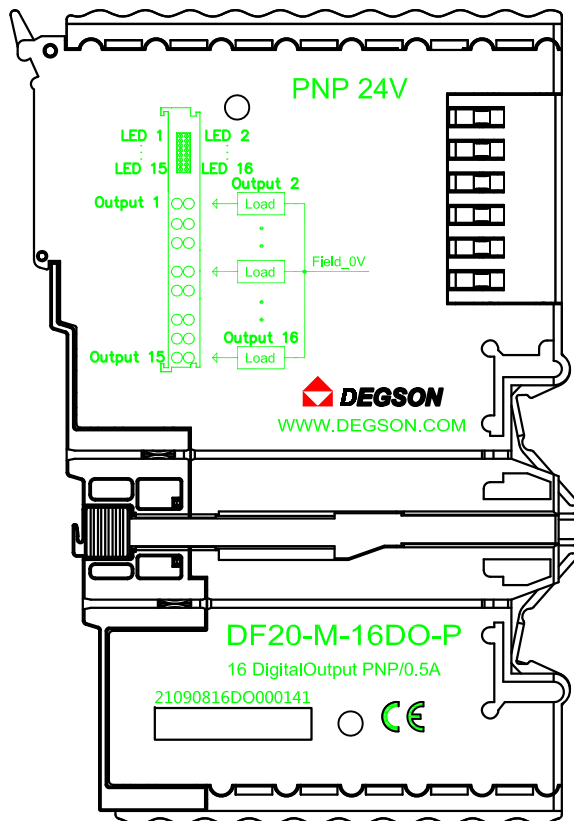



Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。一经发现侵权必究，本公司保留追究法律责任。侵权者将承担全部法律责任。

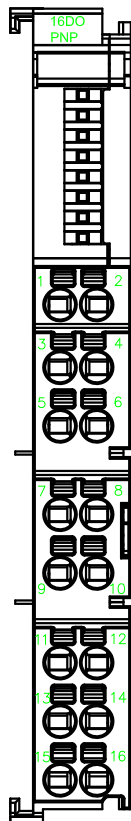

尺寸公差(mm)				
0	>30	>60	>100	>150
~	~	~	~	~
±0.20	±0.30	±0.50	±0.70	±1.00

输出通道:	16
系统电源 (输入电压/电流消耗):	5VDC/90mA
公共端电源(输入电压/允许范围):	24V DC(±20%)
输出信号类型:	PNP
输出额定电压:	24V DC
输出电流:	单通道500mA
负载类型:	阻性、感性、灯负载
模块故障报警:	支持
隔离耐压:	500V
振动测试:	符合EN60068-2-6标准
冲击测试:	符合EN60068-2-27标准
电磁兼容测试:	符合EN61000-4标准
防护等级:	IP20
工作温度:	-25~+60℃
存储温度:	-40~+85℃
相对湿度:	95%, 无冷凝
尺寸规格:	100mm*12mm*67mm

条形码备注及示例:

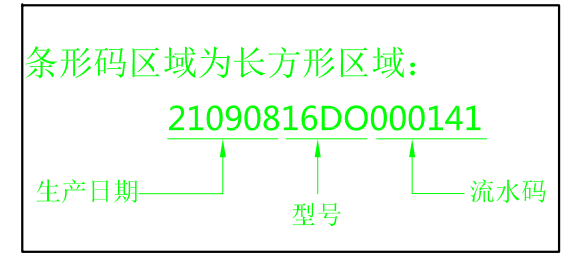

MATERIAL:	/	SURFACE:	/
MAT.NO.:	3005000279	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	Description:	
APPD:		DF20-M-16DO-P	
CHKD:		DRAWING NO.:	200015623
DRFT:	luo DP 2021.08.31	REV:	00
SIZE:	A4	TYPE:	PRODUCT DRAWING
SCALE:	1:1	SHEET:	1/1

REV	ECN	DESCRIPTION	DRFT	DATE